



## 720W 38 Liter Table Top Ultrasonic Cleaner Ultrasonic Cleaning Unit For 500mm Anilox Roller

### Our Product Introduction

#### Basic Information

- Place of Origin: Shenzhen, China
- Brand Name: SkyMen
- Certification: RoHS, CE, FCC, REACH
- Model Number: JP-120S
- Minimum Order Quantity: 1
- Price: Negotiation
- Packaging Details: Wooden case
- Delivery Time: In Stock
- Payment Terms: T/T
- Supply Ability: 8000 pcs per month



#### Product Specification

- Model: JP-120S
- First Tank Volume: 38L
- Tank Size: 500\*300\*250mm
- Custom Size: Acceptable
- Ultrasonic Power: 720W
- Heating Power: 800W
- Frequency: 40KHz
- Time Setting: 0~30 Minutes Adjustable
- Temperature: 20~80°C Adjustable
- Material: SUS304
- Highlight: **38 Liter Table Top Ultrasonic Cleaner, 720W FCC Table Top Ultrasonic Cleaner, 500mm Anilox Roller Ultrasonic Cleaning Unit**



## Product Description

### 38 Liter Ultrasonic Cleaning Machine for 500mm Anilox Roller with Heater

#### How to use ultrasonic cleaner more safely

Drying the ultrasonic cleaner will seriously damage the ultrasonic cleaning! Please fill at least half of the height of the cleaning solution. Do not exceed the maximum amount of tick cavity on the liquid surface.

Solvent-based ultrasonic cleaning of chambers that do not contain flammable liquids. Because of the need for flammable organic solvents, targeted Elma's X Tea LSM cleaning operation was selected.

Caution: Ultrasonic waves can accelerate the evaporation of liquids, and can form a layer of liquid on the surface of the mist, which will cause combustion contact with fire sources.

Non-acidic liquid is directly stored in the stainless steel cleaning tank. Stainless steel cleaning tanks may be damaged for a short time due to crevice corrosion. Household cleaners often contain corrosive substances and other reasons. Please select the type of special cleaner. If you want to use abrasive cleaners for cleaning, we recommend that you use plastic cleaning tanks to prevent corrosion.

Place for cleaning

The cleaning material does not directly contact the bottom of the cavity, please put in a stainless steel basket for operation.

Please remove large particles, rust residue and other deposits, which will cause the same damage to the cleaning tank.

If using powder or granular cleaning media from other suppliers, make sure that the media can be completely dissolved in the cleaning solution, otherwise the residual powder or particles covering the bottom surface of the ultrasonic cleaning work will cause the bottom layer to be corroded or form the bottom surface.

Washing fluid

For the surface materials and contaminants of the material being purified, select the appropriate cleaning agent. Experts and product data are invited to provide advice on selecting the most appropriate dosage and the most compatible agent binding. If water is used as the medium, it is recommended that you add an appropriate amount of water Elma cleaning agent to improve the cleaning effect. Elma Chemical Cleaner contains a surfactant, which will reduce the surface tension of the cleaning medium tank, and is specially designed for ultrasonic cleaning, so that the ultrasonic distribution is uniform.

#### Specification:

Model	JP-120S
Ultrasonic frequency	40,000Hz
Material of tank	SUS304
Material of shell	SUS304
Capacity	30L
Drain value	Yes
Timer	0~30 mins adjustable
Temperature	20~80°C adjustable
Power supply type 1	AC 100~120V, 50/60Hz
Power supply type 2	AC 220~240V, 50/60Hz
Ultrasonic power	720W
Heating Power	800W
Tank inner dimension	500*300*250mm
Unit dimension	585*347*385mm
Packing size	680*455*450mm
N.W.	19kg
G.W.	20kg
Certificate	FCC & CE & RoHS & REACH

#### Other model choice:

##### 0.8~38L

Model	Capacity (L)	Tank Size (L*W*H)mm	Ultrasonic Power (W)	Heating Power (W)	Frequency (KHz)
008	0.8	150*85*65	35	0	40
009	0.9	150*135*65	60	100	40
010S	2	150*165*100	60	100	40
JP-020S	3.2	240*135*100	120	100	40
JP-030S	4.5	300*150*100	180	200	40
JP-031S	6.5	300*150*150	180	200	40
JP-040S	10	300*240*150	240	200	40
JP-060S	15	330*300*150	360	300	40
JP-080S	22	500*300*150	480	500	40
JP-100S	30	500*300*200	600	500	40
<b>JP-120S</b>	<b>38</b>	<b>500*300*250</b>	<b>720</b>	<b>800</b>	<b>40</b>


##### 38~960 Liter:

Model	Capacity (L)	Tank Size (L*W*H)mm	Transducers (pcs)	Ultrasonic Power (W)	Heating Power (W)	Frequency (KHz)
JP-120ST	38	500X300X250	12	600	1500	28/40

JP-180ST	53	500X350X300	18	900	1500	28/40
JP-240ST	77	550X400X350	24	120	3000	28/40
JP-300ST	99	550X450X400	30	1500	3000	28/40
JP-301ST	99	800X300X400	30	1500	3000	28/40
JP-360ST	135	600X500X450	36	1800	4500	28/40
JP-480ST	175	700X500X500	48	2400	6000	28/40
JP-600ST	264	800X600X550	60	3000	6000	28/40
JP-720ST	360	1000X600X600	72	3600	9000	28/40
JP-1108ST	540	1000X900X600	108	5400	18000	28/40
JP-1144ST	960	1200X1000X800	144	7200	27000	28/40

Additional functions can be added, such as Filter, Lift, DI water etc.

#### Cleaning effect:

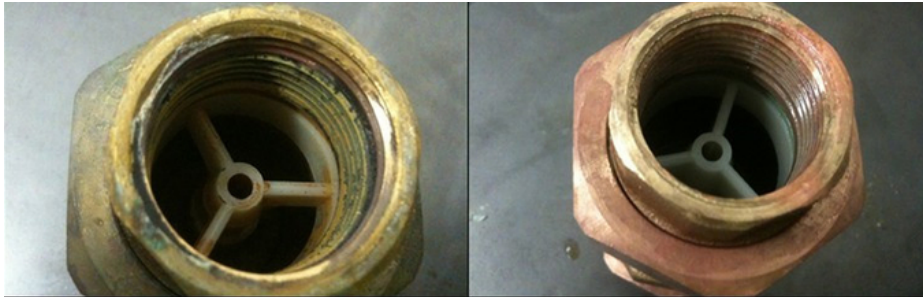

#### Our service:

##### Pre-sale Service

1. Reply your messages or emails within 12 hours.
2. OEM&ODM acceptable(Custom- made logo or package).
3. Professional solutions are provided.
4. New product recommendation.
5. Drop- shipping available

##### After- sales Service

Within 12 months, if there will be any problem with the machine, we will allow the professional person to handle it for you or to the site.



**Skymen Technology Corporation Limited**



86-755-27094405



info@skymen.cc



skymenultrasonic.com

Floor 1st & 2nd, Building 3, Tanggang Taifeng Industrial Park, Dawangshan Community, Shajing Street, Bao'an District, Shenzhen