

15L 360W Benchtop Ultrasonic Cleaner For **Dropper Glass Container**

Basic Information

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity:
- Price:
- · Packaging Details:
- Delivery Time:
- Payment Terms:
- Supply Ability:
- 060S 1

Skymen

Shenzhen, China

RoHS, CE, FCC, SGS

Negotiation Wooden case

060S

- In Stock
- T/T 8000 pcs per month



Product Specification

- Model:
- First Tank Volume:
- Tank Size:
- Ultrasonic Power:
- Heating Power:
- Frequency:
- Timer:
- Temperature:
- Highlight:

15L 330*300*150mm 360W 300W 40KHz 0~30 Minutes Adjustable 20~80°C Adjustable 360W Benchtop Ultrasonic Cleaner,

15L Benchtop Ultrasonic Cleaner, **Dropper Glass Container Ultrasonic Washer**



More Images



Product Description

Surgery Tools Ultrasonic Washer for Dropper Glass Container lab tools 40KHz 15L 360W

Specification:	
Model	060S
Ultrasonic frequency	40,000Hz
Material of tank	SUS304
Material of shell	SUS304
Capacity	15L
Timer	0~30 mins adjustable
Temperature	20~80°C adjustable
Power supply type 1	AC 100~120V, 50/60Hz
Power supply type 2	AC 220~240V, 50/60Hz
Drain value	1 set
Ultrasonic power	360W
Heating Power	300W
Tank inner dimension	330*300*150mm
Unit dimension	400*350*280mm
Packing size	465*420*345mm
N.W.	9.4kg
G.W.	10.5kg
Warranty	1 year
Certificate	SGS & FCC & CE & RoHS

Similar models with different capacity:

Stainless Bench Top

-	Degas			
		heating indicator	ultrasonic indicator	
0	-	ULTRASON		
	Time display	8888 M V AMV V	· Non Acres	Dagas indicator Time display Semiwave indicator
RETRAINING CLEANER CO.	Temp+			Timer-
	Heater switch	Cawlord Bit		ultrasonic switch
9 1000 9		Temp-	Timer+	
		Cam	human a	

Model	Capacity	Tank Size	Ultrasonic Power	Heating Power	Frequency	
	(L)	(L*W*H)mm	(W)	(W)	(KHz)	
008	0.8	150*85*65	35	0	40	
009	0.9	150*135*65	60	100	40	
010T	2	150*165*100	60	100	40	
020S	3.2	240*135*100	120	100	40	
030S	4.5	300*150*100	180	200	40	
031S	6.5	300*150*150	180	200	40	
040S	10	300*240*150	240	200	40	
060S	15	330*300*150	360	300	40	
080S	22	500*300*150	480	500	40	
100S	30	500*300*200	600	500	40	


Digital Series Product Parameters

Model						্ হয় 💃	
	0205	030S	0315	040S	060S	080S	100S
Capacity (L)	3.2L	4.5L	6.5L	10L	15L	22L	30L
Tank Size (mm)	240*135*100	300*150*100	300*150*150	300*240*150	330*300*150	500*300*150	500*300*200
Overall Size (mm)	270*185*230	330*200*235	375*200*275	380*290*280	400*350*280	585*330*280	585*327*333
Ultrasonic Power	120W	180W	180W	240W	360W	480W	600W
Heating Power	100W	200W	200W	200W	300W	500W	500W
Transducer Quantity	2pcs	3pcs	3pcs	4pcs	6pcs	8pcs	10pcs
Time Setting	0-30min						
Temperature Setting	up to 80°C						
With Drainage Tap	NO	NO	YES	YES	YES	YES	YES
With Cleaning Basket	YES						
Tank Materials	SUS304						

Image:





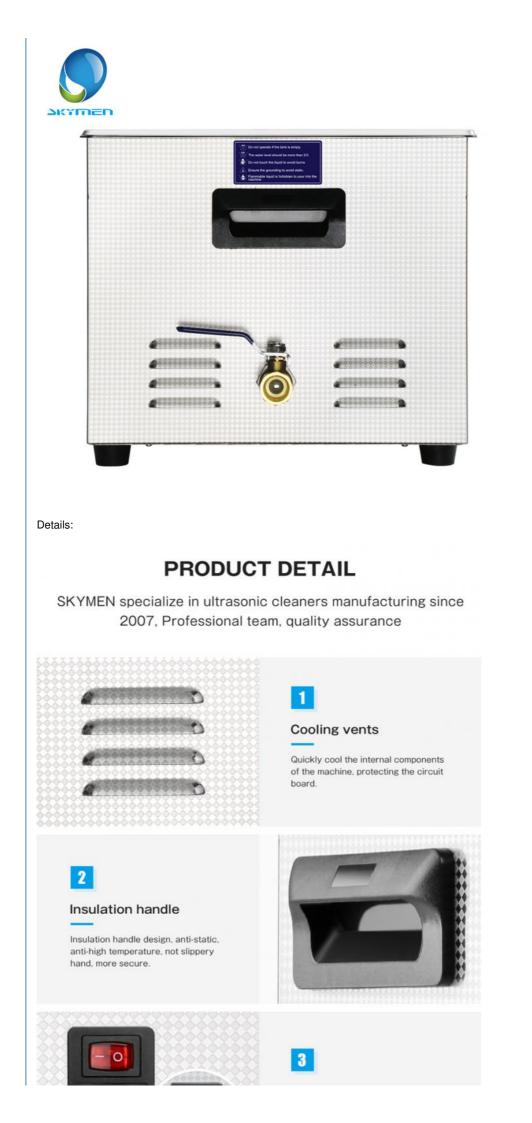


Double insurance

Independent switch operation safety, built-in spare fuse, double insurance.



4

Thickness 1.1mm, heat-resisting and corrosion-resisting, safety and health







The drain vavle is made of high quality stainless steel, corrosion-resistant and switch adjustable



If you want choose other function, please see the buying guide as below:

1. Choose suitable tank size based on cleaning objects, size can be customized

- 2. Choose suitable frequency, 40kHz for common use and 28kHz for heavy duty oil removal
- 3. Choose tank material based on solvent, SUS304 or SUS316L

4. Other function optional, Ultrasonic cleaning tank + Ultrasonic Rinsing tank; Ultrasonic cleaning tank + Air agitation Rinsing tank; Ultrasonic cleaning tank + Water Rinsing tank; Ultrasonic cleaning tank + Hot air drying tank; Oil filtration system: detergent recycle use to save much cost.

Application:

Jewelry industry, medical industry, electronic factory, molding factory, car workshop, diesel workshop, car industry, scientific laboratory, university, dental clinics, eyeglass shop, hardware tools shop, printing industry.

