

45KHz 2.85 Gallon Ultrasonic Vibration Cleaner 240W LED Screen

Our Product Introduction

for more products please visit us on skymenultrasonic.com

Basic Information

- Place of Origin: China
- Brand Name: SkyMen
- Certification: CE ROHS FCC SGS
- Model Number: JM-10D-28/45
- Minimum Order Quantity: 1 unit
- Price: Negotiation
- Packaging Details: 1 unit per box
- Delivery Time: In Stock
- Supply Ability: 800 pcs per month



Product Specification

- Model: JM-10D-45/80
- Frequency: 45/80KHz
- Capacity: 2.85 Gallon
- Tank Size: 12*9*6 Inch
- Ultrasonic Power: 0~240W
- Heating Power: 500W
- Material: SUS 304
- G.W: 9KG
- Highlight: 2.85 Gallon Ultrasonic Vibration Cleaner, 240W Ultrasonic Vibration Cleaner, 45KHz Double Frequency Ultrasonic Cleaner



More Images



Product Description

Double Frenquncy 45/80KHz Ultrasonic Vibration with LED Screen 2.85 Gallon

Model	JM-10D-45/80
Ultrasonic Frequency	45/80KHz
Transducer Quantity	4pcs
Ultrasonic Power	0~240W
Heating Power	500W
Tank Capacity	10.8L/2.85Gallon
Tank Size	300*240*150mm
Machine size	380*290*280mm
Packing size	440*365*360mm
Net weight	7.6KG
Gross weight	9KG
Time Range	0~99 Hours
Temperature Range	Room temperature~80°C/176°F
Tank material	SUS 304
Tank thickness	1.1mm
Shell thickness	0.8mm
Slope panel degree	20°
Drain Valve	✓
General switch	✓
Degas	✓
Semi-wave	✓
Lid	✓
Basket	✓
Voltage	110V; 220V
Plug	European Plug; US plug; Austrslian Plug; British Plu
Detergent suggestion	No stronger acid or alkali
OEM	Yes
OEM MOQ	50pcs
Origin	Guangdong China
Business category	Manufacturer
Lead time	7 days after payment if order quantity is below 20pcs
Payment term	By cash; by credit card; by Paypal
Warranty	1 year


Product Show:



HEATING SYSTEM

Built-in heating board, You can adjust the heating water temperature from 20 to 80°C. It's efficient to remove oil and wax

Heating board

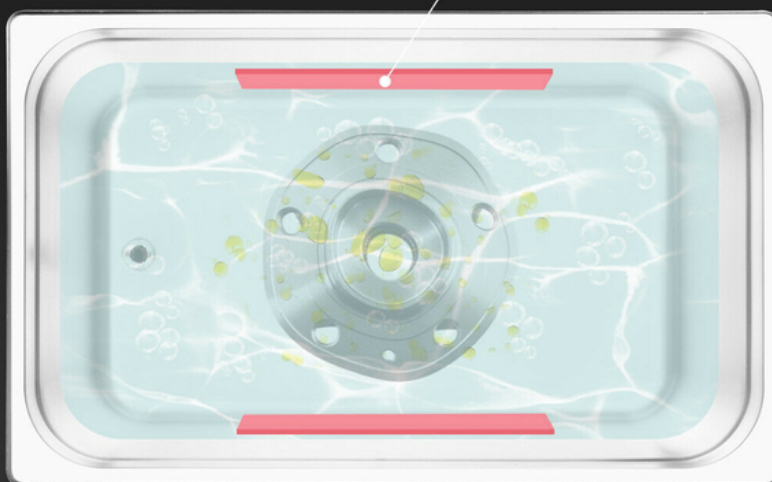

PAY ATTENTION ON DETAILS

01

Insulated handle design

Anti-static and anti-high temperature, more secure



02

Stainless steel drain valve

One-half inch large drain valve, quicker to drain



03

Cooling vents

Fast heat dissipation, protecting the circuit board and enhancing the service life



04

Heat - resistant power cord

One-half inch large drain valve, quicker to drain



05

Non-slip anti-shock pad



Non-slip, safer



Safety switch
With ground insurance switch




Stainless steel cleaning basket
Fine workmanship and durability



INDUSTRIAL TRANSDUSER

Strong cleaning resistance, good durability with powerful cleaning effect.

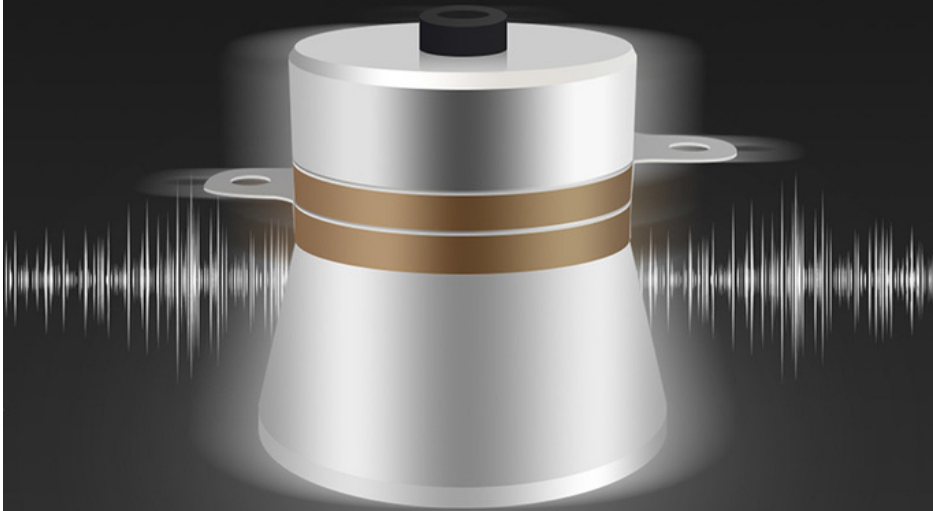

Frequency
40kHz

Ultrasonic power
240W

Transducer
4 Pcs

HEATING SYSTEM

Built-in heating board, You can adjust the heating water temperature from 20 to 80°C. It's efficient to remove oil and wax



Heating temperature
20-80°C



Heating power
200W




Application Area:

MULTIPURPOSE CLEANING

It's efficient for most of household items that could be used to clean. get the best cleaning effects with the least effort.



Glasses



Watchband



Jewelry




Tableware



Toothbrush



Denture



Shaver



Bottles&nipples



Nail Tools

Before



After



Before



After



Before



After





Before



After



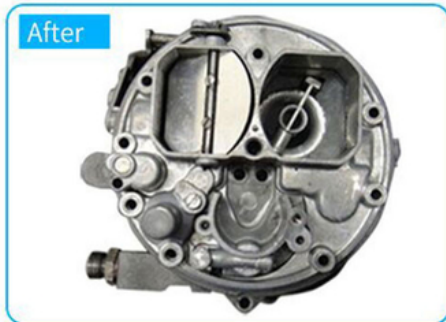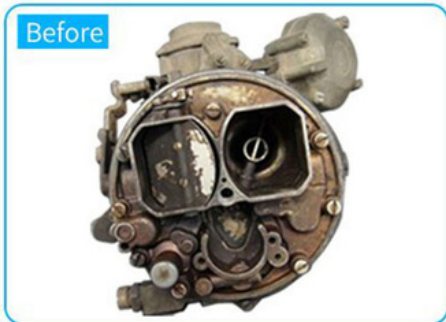

COMPARISON OF CLEANING EFFECT





Suitable for varieties of palces



Factory



Labs



Hardware store



Before



After



Before



After



Before



After

Industrial Ultrasonic Cleaning Machine



Model	Capacity (L)	Tank Size (L*W*H)mm	Transducers (pcs)	Ultrasonic Power (W)	Heating Power (W)	Tank thickness (mm)	Frequency (KHz)
JP-120ST	38	500X300X250	12	600	1500	2	28/40
JP-180ST	53	500X350X300	18	900	1500	2	28/40
JP-240ST	77	550X400X350	24	1200	3000	2	28/40
JP-300ST	99	550X450X400	30	1500	3000	2	28/40
JP-301ST	99	800X300X400	30	1500	3000	2	28/40
JP-360ST	135	600X500X450	36	1800	4500	2	28/40
JP-480ST	175	700X500X500	48	2400	6000	2	28/40
JP-600ST	264	800X600X550	60	3000	6000	2	28/40
JP-720ST	360	1000X600X600	72	3600	9000	2	28/40
JP-1108ST	540	1000X900X600	108	5400	18000	2	28/40
JP-1144ST	960	1200X1000X800	144	7200	27000	2	28/40

Immersible Transducer Plate

Image:



Model	Plate Size (L*W*H)mm	Transducers (pcs)	Ultrasonic Power (W)	Generator (set)	Suitable tank (L)
JP-1006I	305*205*100	6	300	1	10~15
JP-1012I	355*305*100	12	600	1	30~40
JP-1018I	340*280*100	18	900	1	60~70
JP-1024I	430*280*100	24	1200	1	70~80
JP-1030I	460*370*100	30	1500	1	90~100
JP-1036I	550*450*100	36	1800	1	130~140
JP-1048I	600*450*100	48	2400	2	170~180

Immersible Transducer Tube

Image:



Model	Tube Size (D*H)mm	Transducers (pcs)	Ultrasonic Power (W)	Generator (set)	Length of wire (M)
-------	----------------------	----------------------	-------------------------	--------------------	-----------------------

JM-1003	57*180	3	150	1	1.5
JM-1006	57*300	6	300	1	1.5
JM-1012	57*550	12	600	1	1.5
JM-1018	57*750	18	900	1	1.5
JM-1024	57*1000	24	1200	1	1.5
JM-1036	57*1520	36	1800	1	

Immersible Transducer Plate/tube can be put in any tank, but it doesn't have heating function.

The price of tube is much higher than plate, Ultrasonic Tube is only used for special purpose, such as in Lab.



Skymen Technology Corporation Limited



86-755-27094405



info@skymen.cc



skymenultrasonic.com

Floor 1st & 2nd, Building 3, Tanggang Taifeng Industrial Park, Dawangshan Community, Shajing Street, Bao'an District, Shenzhen