

China

Skymen

JP-080S

Negotiation

1unit per box

8000 pcs per month

In Stock

CE ROHS FCC SGS

## FCC 500W Heating Benchtop Ultrasonic Cleaner For Printing Screen Stencil

## **Basic Information**

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity: 1 unit
- Price:
- Packaging Details:
- Delivery Time:
- Supply Ability:

 Image: series of the series

## **Product Specification**

<ul> <li>Highlight:</li> </ul>	500W Heating Benchtop Ultrasonic Cleaner, FCC Benchtop Ultrasonic Cleaner, 40KHz Printing Screen Stencil Cleaner
• G.W:	14KG
Material:	SUS304
<ul> <li>Heating Power:</li> </ul>	500W
Ultrasonic Power:	480W/240W
• Tank Size:	12*9*6 Inch
Capacity:	5.81 Gallon
<ul> <li>Frequency:</li> </ul>	40KHz
• Model:	JP-080S

Our Product Introduction

#### **Product Description**

Model	JP-080S	
JItrasonic Frequency	40KHz	
Fransducer Quantity	8pcs	
Jltrasonic Power	480/240W	
Heating Power	500W	
Fank Capacity	22L/5.81Gallon	
Fank Size	500*300*150mm	
Machine size	585*330*280mm	
Packing size	690*460*360mm	
Net weight	14KG	
Gross weight	15KG	
Time Range	0~30 minutes	
Temperature Range	Room temperature~80°C/176°F	
Fank material	SUS304	
Fank thickness	1.1mm	
Shell thickness	0.8mm	
Slope panel degree	20°	
Noisy	Slight	
Drain Valve	1	
General switch	1	
Degas	<i>✓</i>	
Semi-wave	1	
Lid	✓ ✓	
Basket	1	
Voltage	110V; 220V	
Plug	European Plug; US plug; Austrslian Plug; British Plu	
Detergent suggestion	No stronger acid or alkali	
DEM	Yes	
DEM MOQ	20pcs	
Drigin	Guangdong China	
Business category	Manufacturer	
Lead time	7 days after payment if order quantity is below 20pcs	
Payment term	By cash; by credit card; by Paypal	
Warranty	1 year	
	and a stimulation of a second s	

(1) Machinery industry: removal of anti-rust grease; cleaning of measuring tools; degreasing and rust removal of mechanical parts; cleaning of engines, carburetors and auto parts; dredging and cleaning of filters and screens, etc.

(2) Surface treatment industry: degreasing and rust removal before electroplating; cleaning before ion plating; phosphating treatment; removing carbon deposits; removing oxide scale; removing polishing paste; surface activation treatment of metal workpieces, etc.

(3) Instrumentation industry: high cleanliness of precision parts, cleaning before assembly, etc.

(4) Electronic industry: Removal of rosin and solder spots on printed circuit boards; cleaning of mechanical and electronic parts such as high voltage contacts.

(5) Medical industry: cleaning, disinfection, sterilization of medical equipment, cleaning of laboratory utensils, etc.

(6) Semiconductor industry: high cleanliness cleaning of semiconductor wafers.

(7) Watch first and decoration industry: remove sludge, dust, oxide layer, polishing paste, etc.

(8) Chemical and biological industries: cleaning and descaling of laboratory utensils.

(9) Optical industry: degreasing, sweating and dust removal of optical devices.

(10) Textile printing and dyeing industry: cleaning textile spindles, spinnerets, etc.

(11) Petrochemical industry: cleaning and dredging of metal filters, cleaning of chemical containers, exchangers, etc.

ULTRASONIC CLEANER Upgrade series (with degas & serniwave)



Model	JP-020S	Tank Capacity	3.2L
Material	Stainless Steel	Usable Capacity	2.5L
Ultrasonic Power	120W	Tank Size	240mm*135mm*100mm
Heating Power	100W	Overall Size	270mm*185mm*230mm
Frequency	40kHz	Time Setting	0-30min (adjustable)
Transducers	2 pcs	Temp Setting	up to 80°C (adjustable)



## (€ RoHS F©

(€ RoHS F©

power

Model	JP-030S	Tank Capacity	4.5L
Material	Stainless Steel	Usable Capacity	3.7L
Ultrasonic Power	180W	Tank Size	300mm*150mm*100mm
Heating Power	200W	Overall Size	330mm*200mm*235mm



Frequency	40kHz	Time Setting	0-30min (adjustable)
Transducers	3 pcs	Temp Setting	up to 80°C (adjustable)

## (€ RoHS F©

Model	JP-031S	Tank Capacity	6.5L
Material	Stainless Steel	Usable Capacity	5.9L
Ultrasonic Power	180W	Tank Size	300mm*150mm*150mm
Heating Power	200W	Overall Size	375mm*200mm*275mm
Frequency	40kHz	Time Setting	0-30min (adjustable)
Transducers	3 pcs	Temp Setting	up to 80°C (adjustable)

## (€ RoHS F©

Model	JP-040S	Tank Capacity	10L
Material	Stainless Steel	Usable Capacity	9.5L
Ultrasonic Power	240W	Tank Size	300mm*240mm*150mm
Heating Power	200W	Overall Size	380mm*290mm*280mm
Frequency	40kHz	Time Setting	0-30min (adjustable)
Transducers	4 pcs	Temp Setting	up to 80°C (adjustable)

## (€ RoHS F©

Model	JP-050S	Tank Capacity	14.5L
Material	Stainless Steel	Usable Capacity	11.5L
Ultrasonic Power	300W	Tank Size	300mm*240mm*200mm
Heating Power	200W	Overall Size	370mm*270mm*325mm
Frequency	40kHz	Time Setting	0-30min (adjustable)
Transducers	5 pcs	Temp Setting	up to 80°C (adjustable)

## (€ RoHS F©

Model	JP-060S	Tank Capacity	15L
Material	Stainless Steel	Usable Capacity	12.5L
Ultrasonic Power	360W	Tank Size	330mm*300mm*150mm
Heating Power	300W	Overall Size	400mm*350mm*280mm
Frequency	40kHz	Time Setting	0-30min (adjustable)
Transducers	6 pcs	Temp Setting	up to 80°C (adjustable)

## (€ RoHS F©

Model	JP-070S	Tank Capacity	20L
Material	Stainless Steel	Usable Capacity	16.5L
Ultrasonic Power	480W	Tank Size	330mm*300mm*200mm
Heating Power	300W	Overall Size	400mm*330mm*330mm
Frequency	40kHz	Time Setting	0-30min (adjustable)
Transducers	8 pcs	Temp Setting	up to 80°C (adjustable)

## (€ RoHS F©

Model	JP-080S	Tank Capacity	22L
Material	Stainless Steel	Usable Capacity	19.5L
Ultrasonic Power	480W	Tank Size	500mm*300mm*150mm



#### ULTRASONIC CLEANER Upgrade series (with degas & semiwave)



#### ULTRASONIC CLEANER Upgrade series (with degas & semiwave)



#### ULTRASONIC CLEANER Upgrade series (with degas & semiwave)



#### ULTRASONIC CLEANER Upgrade series (with degas & semiwave)



#### ULTRASONIC CLEANER Upgrade series (with degas & semiwave)





000.000C

Heating Power	500W	Overall Size	585mm*330mm*280mm
Frequency	40kHz	Time Setting	0-30min (adjustable)
Transducers	8 pcs	Temp Setting	up to 80°C (adjustable)

(€ RoHS F©

#### ULTRASONIC CLEANER Upgrade series (with degas & semiwave)

	Model	JP-100S	Tank Capacity	30L
	Material	Stainless Steel	Usable Capacity	27L
	Ultrasonic Power	600W	Tank Size	500mm*300mm*200mm
	Heating Power	500W	Overall Size	585mm*327mm*333mm
	Frequency	40kHz	Time Setting	0-30min (adjustable)
	Transducers	10 pcs	Temp Setting	up to 80°C (adjustable)

#### **Product Show:**









## **Cooling vents**

Fast heat dissipation, protecting the circuit board and enhancing the service life








Heat - resistant power cord

One-half inch large drain valve, quicker to drain



Non-slip anti-shock pad Non-slip, safer

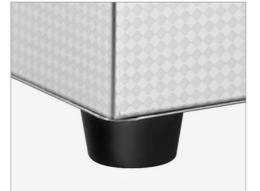






Safety switch With ground insurance switch



Stainless steel cleaning basket Fine workmanship and durability

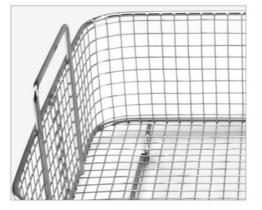

**Application Area:** 

## **MULTIPURPOSE CLEANING**

It's efficient for most of household items that could be used to clean. get the best cleaning effects with the least effort.








Before



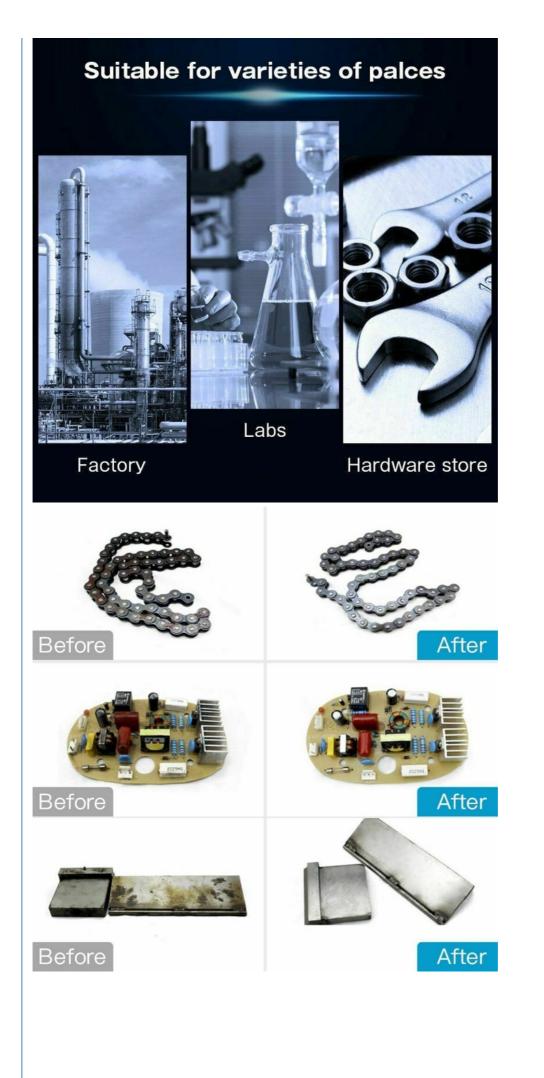

# **PRODUCT FEATURES**

mechanical timing: The working time adjustable from 0-30 minutes or normal open mode.

### mechanical control:

mechanical control heater, 20-80 adjustable, temperature error within +-2

## 3

Δ

5

6

1

high quality bath: High qualtiy SUS 304 stainless steel punch forming bath with noise proof

#### anti-skid treatment:

the machine is steady with the non-slip, shock-proof, anti-static, pressure-proof mats at the bottom

## ceramic heater:

New ceramic heater is stable and efficient

. Humanized design,remarkable cleaning effect: Tank capactity over 6L with the drain vavle; high cleaning efficiency, no harm to surface

#### Stainless Bench Top



Model	Capacity	Tank Size	Ultrasonic Power	Heating Power	Frequency	Tank thickness	Material
	(L)	(L*W*H)mm	(W)	(W)	(KHz)	(mm)	SUS304
JP-008	0.8	150*85*65	35	0	40	1	SUS304
JP-009	0.9	150*135*65	60	100	40	1	SUS304
JP-010T	2	150*165*100	60	100	40	1	SUS304
JP-020S	3.2	240*135*100	120	100	40	1	SUS304
JP-030S	4.5	300*150*100	180	200	40	1	SUS304
JP-031S	6.5	300*150*150	180	200	40	1	SUS304
JP-040S	10	300*240*150	240	200	40	1	SUS304
JP-060S	15	330*300*150	360	300	40	1	SUS304
JP-080S	22	500*300*150	480	500	40	1	SUS304
JP-100S	30	500*300*200	600	500	40	1	SUS304

Industrial Ultrasonic Cleaning Machine



Model	Capacit y	Tank Size	Transducer s	Ultrasonic Power	Heating Power	Tank thickness	Frequency
	(L)	(L*W*H)mm	(pcs)	(W)	(W)	(mm)	(KHz)
JP-120ST	38	500X300X250	12	600	1500	2	28/40
JP-180ST	53	500X350X300	18	900	1500	2	28/40
JP-240ST	77	550X400X350	24	120	3000	2	28/40
JP-300ST	99	550X450X400	30	1500	3000	2	28/40
JP-301ST	99	800X300X400	30	1500	3000	2	28/40
JP-360ST	135	600X500X450	36	1800	4500	2	28/40
JP-480ST	175	700X500X500	48	2400	6000	2	28/40
JP-600ST	264	800X600X550	60	3000	6000	2	28/40
JP-720ST	360	1000X600X600	72	3600	9000	2	28/40
JP- 1108ST	540	1000X900X600	108	5400	18000	2	28/40
JP- 1144ST	960	1200X1000X800	144	7200	27000	2	28/40

#### Immersible Transducer Plate Image:





Model	Plate Size	Transducer s	Ultrasonic Power	Generator	Suitable tank
	(L*W*H)mm	(pcs)	(W)	(set)	(L)
JP-1006	il 305*205*100	6	300	1	10~15
JP-1012	355*305*100	12	600	1	30~40
JP-1018	a 340*280*100	18	900	1	60~70
JP-1024	I 430*280*100	24	1200	1	70~80
JP-1030	460*370*100	30	1500	1	90~100
JP-1036	il 550*450*100	36	1800	1	130~140
JP-1048	il 600*450*100	48	2400	2	170~180



	(D*H)mm	(pcs)	(W)	(set)	(M)
JM-1003	57*180	3	150	1	1.5
JM-1006	57*300	6	300	1	1.5
JM-1012	57*550	12	600	1	1.5
JM-1018	57*750	18	900	1	1.5
JM-1024	57*1000	24	1200	1	1.5
JM-1036	57*1520	36	1800	1	

Immersible Transducer Plate/tube can be put in any tank, but it doesn't have heating function.

The price of tube is much higher than plate, Ultrasonic Tube is only used for special purpose, such as in Lab.

≤kymen 🏹	, D

86-755-27094405

Skymen Technology Corporation Limited

info@skymen.cc 📀 skymenultrasonic.com

Floor 1st & 2nd, Building 3, Tanggang Taifeng Industrial Park, Dawangshan Community, Shajing Street, Bao'an District, Shenzhen