

SUS304 2L Jewelry Ultrasonic Bath 60W Basket Ultrasonic Cleaner CE RoHS

Basic Information

Place of Origin: China
Brand Name: Skymen
Certification: CE ROHS FCC
Model Number: JP-010T
Minimum Order Quantity: 1 unit
Price: Negotiation

• Packaging Details: 1unit per color box, 8 units per big carton

• Delivery Time: In Stock

• Supply Ability: 8000 pcs per month



Product Specification

Application: Cleaning JewelryFunction: Ultrasonic+heating

Basket: Available
Tank Volume: 2L
Heating Power: 100W
Transducer: 1pcs
Ultrasonic Power: 60W
Material: SUS304

• Highlight: SUS304 Jewelry Ultrasonic Bath,

2L Jewelry Ultrasonic Bath, 60W Basket Ultrasonic Cleaner



More Images



Product Description

Jewelry Ultrasonic Bath 2L With Basket Ultrasonic Cleaner with CE RoHS

Jewelry cleaning

Tips

Never use ultrasonic cleaning of gemstones that have been filled with cracks on the surface. For example, diamonds can be filled with lead-containing glassy materials, and emeralds are usually oil, resin or wax. These manual treatments are designed to optimize the surface clarity of the gemstone. However, such treatments are not permanent and may still be worn or removed. Other types of gems may also undergo similar manual processing.

Never use ultrasonic cleaning of organic gem materials. These are porous materials that are easily damaged by the heat generated by the machine and the chemicals in most detergents. Therefore, pearls, corals, tortoise shells, ivory, shell relief, coal jade and amber are not suitable for ultrasonic cleaners.

Never use ultrasonic cleaning of gemstones that are filled with or coated with oil, plastic or wax. These manual treatments are commonly used in emeralds, lapis lazuli, malachite, opal and other gemstones.

Ultrasonic cleaners should also be avoided for gemstones that have been heat treated to optimize color. In addition to the use of transparent rubies and sapphires, the use of ultrasonic cleaners should not be used for star rubies and star sapphires.

Before cleaning the stone, make sure it is safely embedded in the setting. If the waist of the gemstone is improperly mounted, the vibration generated by the ultrasonic cleaner sometimes causes it to loosen or wear.

JP-010T product specification:

or over broader observed and				
Ultrasonic frequency	40,000Hz			
Material of tank	SUS304			
Tank thickness	1mm			
Capacity	2L			
Timer	Digital control, 0~60 mins			
Heater	100W			
Power supply type 1	AC 100~120V, 50/60Hz			
Power supply type 2	AC 220~240V, 50/60Hz			
Transducer q'ty	1pcs			
Ultrasonic power	60W			
Tank inner dimension	150*135*65mm			
Unit dimension	175*160*175mm			
Inner Packing size	255*240*230mm			
Big carton for 12pcs	525*500*485mm for 8pcs			
N.W.	2kg			
G.W.	2.5kg			
OEM	Support			
Certificate	ISO9001:2008 & CE & RoHS			
Lead time	3 days after payment			
	•			


Same series machine with different capacity:

Model	Capacity	Tank Size	Ultrasonic Power	Heating Power	Frequency
	(L)	(L*W*H)mm	(W)	(W)	(KHz)
JP-008	0.8	150*85*65	35	0	40
JP-009	0.9	150*135*65	60	100	40
JP-010T	2	150*165*100	60	100	40
JP-020S	3.2	240*135*100	120	100	40
JP-030S	4.5	300*150*100	180	200	40
JP-031S	6.5	300*150*150	180	200	40
JP-040S	10	300*240*150	240	200	40
JP-060S	15	330*300*150	360	300	40
JP-080S	22	500*300*150	480	500	40
JP-100S	30	500*300*200	600	500	40
JP-120S	38	500*300*250	720	800	40

Images of this model:





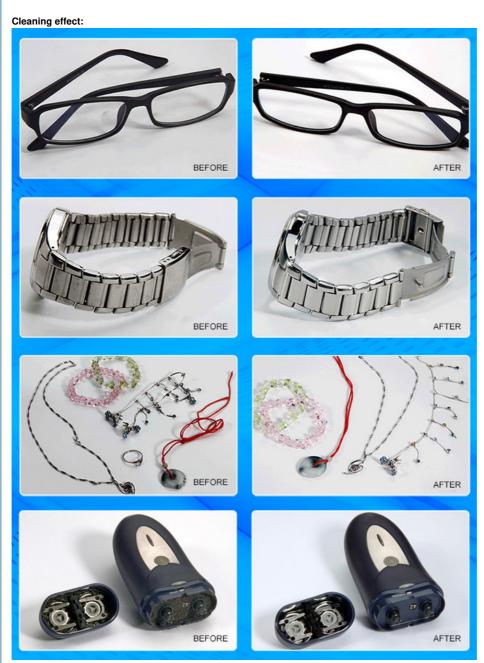

Package Includes:

- 1 x Digital Ultrasonic Cleaner 1 x Cleaning Basket

1 x Manual





Skymen Technology Corporation Limited



86-755-27094405



info@skymen.cc



skymenultrasonic.com

Floor 1st & 2nd, Building 3, Tanggang Taifeng Industrial Park, Dawangshan Community, Shajing Street, Bao'an District, Shenzhen