



100L Degreasing Industrial Ultrasonic Cleaner 95C Heater PSE For Metal Shell

Our Product Introduction

for more products please visit us on skymenultrasonic.com

Basic Information

- Place of Origin: China
- Brand Name: skymen
- Certification: CE, PSE, FCC, ROHS, SGS, ISO9001
- Model Number: JP-300ST
- Minimum Order Quantity: Negotiable
- Price: Negotiation
- Packaging Details: Wooden case: 850x708x970mm
- Delivery Time: In Stock
- Payment Terms: T/T
- Supply Ability: 100 units per month



Product Specification

- Use: Degreasing
- Heating Power: 6000W
- Voltage (v): AC220V, AC380V, 3 Phase
- Frequency: 28KHz/40KHz
- Tank Capacity: 100L
- Certification: CE, RoHS, CSA, FCC
- Condition: New
- Highlight: **100L Degreasing Industrial Ultrasonic Cleaner, 95C Heater Industrial Ultrasonic Cleaner, PSE 100L Ultrasonic Instrument Cleaner**



More Images



Product Description

28K 40KHz Auto Part Grease Rust Remove Industrial Ultrasonic Cleaner

FEATURES

1. stainless steel tank has resistance to wear and long work life.
2. tank capacity: 135 Liter, with Digital timer & heater control
3. with Stainless steel basket
4. Use just tap water, or industrial alcohol and solvent cleaner for more higher cleaning requirement
5. industrial control chip microcontroller. flexible circuit boards control, more secure & stable
6. with drainage, basket, lid and Multi-direction castors
7. Transducer : Korea technique
8. PCB board is independent research and development design production by skymen
9. Generator is high quality technique designed and produced which have been used thousands of units by our USA and Europe customers.
10. circulation pump brand name: CNP (Famous brand)

APPLICATION

1. Car service: Flushing carburetors, injectors, injectors, fuel filter mesh cleaning (petrol), individual parts, assemblies, and entire blocks.
2. Medicine: Washing and polishing of optics, sterilization and cleaning of surgical instruments, vials, dental and pharmaceutical industries; cleaner reusable, molds.
3. Engineering: Cleaning of parts, pipes, wires, etc. before finishing, machining parts and components to the preservation, processing of parts after reopening, welding, grinding, polishing, cleaning strainers in the fuel and hydraulic systems, deburring parts.
4. Instrumentation: Washing and polishing of optics, precision mechanics components, integrated circuits and printed circuit boards.

Ultrasonic mode	Ultrasonic Frequency	40K Hz / 28K Hz
	Material	Stainless Steel SUS304
	Tank thickness	2 mm
	Tank Capacity	99 L
	Timer	1~99 hours adjustable
	Heater	Ambient-95°C adjustable
	Machine voltage	AC 220V/380V, 3phases
	Generator voltage	AC 110V/220V, 1phase
	Ultrasonic Power	600-1500W adjustable
	Heating Power	3000 W
	Feature	With casters with brake
	Drain valve	1 inch
Packing	Tank Size	550*450*400mm (L x W x H)
	Unit Size	730*618*800mm (L x W x H)
	Package Size	Wooden case 850*708*970mm
	N.W. / G.W.	64 kg /87 kg
	Warranty	1 year




Ultrasonci cleaner application



Comparison of before and after cleaning



VS

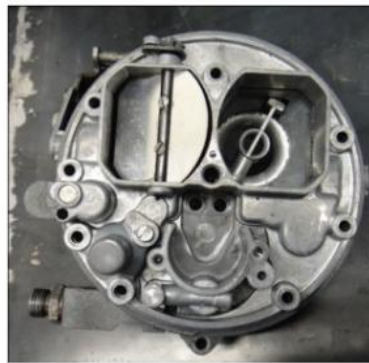

VS



VS



Production flow



① material processing



② product assembling



③ product test



④ finished product



⑤ package



⑥ wooden case



⑦ delivery



Skymen Technology Corporation Limited



86-755-27094405



info@skymen.cc



skymenultrasonic.com

Floor 1st & 2nd, Building 3, Tanggang Taifeng Industrial Park, Dawangshan Community, Shajing Street, Bao'an District, Shenzhen