

# Full Range 38L Industrial Ultrasonic Cleaner Stainless Steel Digital Degassing Heating

# **Basic Information**

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity:
- Price:
- Packaging Details:
- Delivery Time:
- Supply Ability:
- 1 usd 550-600/pcs Wooden Case 8days

CE/RoHS/ISO9001

3000 PCS per month

Shenzhen

Skymen

JP-120ST



## **Product Specification**

| Frequency:                            | 40Hz                                |
|---------------------------------------|-------------------------------------|
| Material:                             | Stainless Steel SUS304/SUS316       |
| <ul> <li>Tank Thickness:</li> </ul>   | 2mm                                 |
| <ul> <li>Tank Capacity:</li> </ul>    | 38L                                 |
| • Timer:                              | 1-99min                             |
| • Heater:                             | Room Temp~80°C Adjustable           |
| <ul> <li>Ultrasonic Power:</li> </ul> | 600W                                |
| <ul> <li>Heating Power:</li> </ul>    | 1500W                               |
| Unit Size:                            | 680*500*835mm                       |
| <ul> <li>Voltage:</li> </ul>          | 110V/220V                           |
| • G.W:                                | 65kg                                |
| <ul> <li>Package Size:</li> </ul>     | 790*570*890mm                       |
| Include:                              | With Casters                        |
| <ul> <li>Solvent:</li> </ul>          | SUS304 For Strong Acid And Alkaline |
| • Transducers:                        | 12                                  |
|                                       |                                     |

### **Product Description**

JP-120ST

Model No.

2kymen Image 28/40 kHz Ultrasonic Frequency Material Stainless Steel SUS304 38L Tank Capacity 1~99min adjustable Timer Heater 20°C to 95°C adjustable Degas Yes Ultrasonic model Semiwave Yes AC 100 ~ 120V, 50 / 60Hz Power Supply AC 220 ~ 240V, 50 / 60 Hz Ultrasonic Power 600 W 1500W Heating Power Basket& cover Standard equiped Tank Size 500\*300\*250mm ( L x W x H ) Unit Size 680\*500\*735mm(L x W x H) Packing Package Size 790\*570\*890mm( L x W x H ) N.W. / G.W. 58kg /65 kg Warranty 1 year Automatic measuring of load - frequency and power regulation Fully digital generator – well-adjusted and energy efficient Advanced diagnostics – performance monitoring and service capabilities Features. Top level of cleanliness Quick wash process Good ergonomics in manual handling of lightweight items A cost-effective solution Compact design, small footprint Garage workshops, commercial vehicle repair workshops, fuel test laboratories, marine engine repair, Application. electrical engineers, aeronautical industry, precision and general engineering, engine rebuilding, turbocharger repair shops, etc. Certificates CE/ROHS/FCC/PSE/ISO9001

Skymen JP-120ST 1500W 100L 240V single phase ultrasonic cleaning equipment for engine block oil removing

| 2. Description:                                                                                                                                        |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| A: Material:                                                                                                                                           |
| a. Tank thickness: 2.0mm. (Stainless Steel SUS304)                                                                                                     |
| b. Capacity:38liter                                                                                                                                    |
| c. N.W. / G.W.58KG / 65KG                                                                                                                              |
| d. Warranty: 1 Year                                                                                                                                    |
| B. Dimension:(L* W*H ) mm                                                                                                                              |
| a. Tank size: 500*300*250mm                                                                                                                            |
| b. Unit size: 680*500*735mm                                                                                                                            |
| c. Packing size: 790*570*890mm                                                                                                                         |
| C. Features:                                                                                                                                           |
| a. Stainless steel SUS 304 tank and housing.                                                                                                           |
| b. Stainless steel washing basket and Lid,                                                                                                             |
| c. Full-open lid easy for water filling, drainage valve for dirty water discharge.                                                                     |
| D. Application:                                                                                                                                        |
| <ul> <li>a. Train bearings, industry intrument, hardware instrument, scientific laboratory, automotive<br/>parts, motor, machine tool, etc.</li> </ul> |
| E. Certificates: CE/ROHS/FCC/PSE/ISO2008 9001                                                                                                          |

#### Application:

-Scientific Labs:Eyeglass Frames;Lab Glassware;Optical&Contact Lenses;Pipettesscientific Instruments;Test tubes -Industrial Manufacturing:Assemblies;Gears;Metal&Plastic Parts;Precision Bearings

-Electronic manufacturing:Capacitors;Ceramic Substrates;PC Boards;Packaging Components;Quartz Crystals -Medical and Dental Lab:Burs;Blood Oxygenators;Dental Instruments;Syringe Parts;Surgical Instruments -Jewelry Manufacturing:Chains;Charms;Coins;Intricate Settings;Precious Metals&Gemstones;Watches

If your company has other needs, you can choose the size that suits you according to the chart below

# **Product Parameter**

Drying, filtration, throwing/lifting and other functions are optional. You can contact customer service staff for more details.

| Model     | Tank Size(mm)  | Capacity | Timer   | Frequency | Generator | Ultrasonic<br>Power | Heating<br>Power |
|-----------|----------------|----------|---------|-----------|-----------|---------------------|------------------|
| JP-120ST  | 500X300X250    | 38L      | 1-99min | 28/40KHz  | Built-in  | 600W                | 1.5KW            |
| JP-180ST  | 500X350X300    | 53L      | 1-99min | 28/40KHz  | Built-in  | 900W                | 1.5KW            |
| JP-240ST  | 550X400X350    | 77L      | 1-99min | 28/40KHz  | Built-in  | 1200W               | ЗКW              |
| JP-300ST  | 550X450X400    | 99L      | 1-99min | 28/40KHz  | Built-in  | 1500W               | ЗКW              |
| JP-301ST  | 800X300X400    | 96L      | 1-99min | 28/40KHz  | Built-in  | 1500W               | ЗКW              |
| JP-360ST  | 600X500X450    | 135L     | 1-99h   | 28/40KHz  | External  | 1800W               | 4.5KW            |
| JP-480ST  | 700X500X500    | 175L     | 1-99h   | 28/40KHz  | External  | 2400W               | 6KW              |
| JP-600ST  | 800X600X550    | 264L     | 1-99h   | 28/40KHz  | External  | 3000W               | 6KW              |
| JP-720ST  | 1000X600X600   | 360L     | 1-99h   | 28/40KHz  | External  | 3600W               | 9KW              |
| JP-840ST  | 1500X700X400   | 420L     | 1-99h   | 28/40KHz  | External  | 4200W               | 15KW             |
| JP-960ST  | 1200X500X800   | 480L     | 1-99h   | 28/40KHz  | External  | 4800W               | 15KW             |
| JP-1108ST | 1000X900X600   | 540L     | 1-99h   | 28/40KHz  | External  | 5400W               | 18KW             |
| JP-1120ST | 1000X800X800   | 640L     | 1-99h   | 28/40KHz  | External  | 6000W               | 18KW             |
| JP-1132ST | 1000X1000X800  | 800L     | 1-99h   | 28/40KHz  | External  | 6600W               | 24KW             |
| JP-1144ST | 1200X1000X800  | 960L     | 1-99h   | 28/40KHz  | External  | 7200W               | 30KW             |
| JP-1216ST | 1500X1000X1000 | 1500L    | 1-99h   | 28/40KHz  | External  | 10800W              | 36KW             |

#### How ultrasonic cleaner works:

Electrical energy is coverted into mechanical vibrations thanks to special elaborated transducers. These vibrations are transferred into the fluid through the walls of stainless steel. This creates tiny microscopic vacuum bubbles, which cause consecutive implosions (cavitation). The high-energy jets that are thus created can efficiently remove dirt from surfaces an materials placed in the cleaning bath.

An ultrasonic cleaner in your kitchen will save time and reduce effort while providing a safe solution for your kitcheware. With the help of oil remove detergent ,the ultrasonic cleaner could fast and efficient take the oil ,polish the kitcheware. when using an ultrasonic cleaner on glassware, plasticware, and your lab instruments. Whether you are cleaning **oven trays**, **pans.** studies have shown that it can be up to 30 times faster while delivering thoroughly clean results

About Skymen:

Here are some information about our company. You can have a check





Sales team of more than 80 people



R & D team



**Production Line** 

# Why Choose Skymen?

VS

# Skymen



Clear operation panel and easy to operate



Concave cylinder port design, anti-overflow

# ·

Others

The panel is small and requires bending operation



Flat cylinder drool is easy to splash



Independent R&D of ultrasonic generator with stable output




Use old mechanical generators

# **Skymen Services**













Factory direct sales



Installation training


Fast delivery

Support customization

• Experts will solve the problems of cleaning process, cleaning experiment and standard equipment trial for you for free.

Provide free technical support and equipment services, including spare parts and working hours.

**3** If there is any problem or situation during use, reply within 2 hours after receiving the notification, and within 8 hours make corresponding solutions,

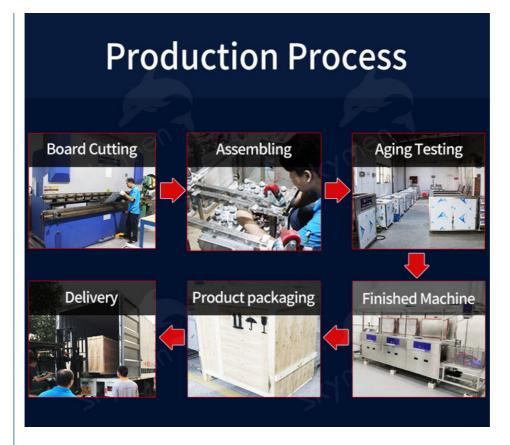

# FAQ

#### How about after sales services?

12 months warranty for SKYMEN ultrasonic cleaner. Any technical problem during warranty time, free replacement parts will be sent to your door. And technical support is also available after 1 year.

#### What are advantages of ultrasound over traditional cleaning methods?

- 1).minimizes the use of manual labor
- 2).makes cleaning and degreasing without the use of organic solvents
- 3).reaches every area of product and remove all types of dirt
- 4).shorten processes such as extraction, dispersion, purification, and chemical reactions.
- 5).eliminates costly mechanical and chemical cleaning of heat exchangers

#### Will ultrasonic cleaning damage item's parts?

Ultrasonic cleaning is considered as safe cleaning way for most parts; In some cases, it is necessary to observe carefully. The effect of thousands of implosions per second is very powerful, and

the cleaning process is safe.

