

China

Skymen

JP-1018I

In Stock

T/T

CE ROHS FCC SGS

USD300~1200USD / SET

8000 pcs per month

1unit per carton / wooden case

2.5mm Submersible Ultrasonic Transducer 1500W For Cleaning Heat Exchanger

Basic Information

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity: 1 unit
- Price:
- Packaging Details:
- Delivery Time:
- Payment Terms:
- Supply Ability:



Product Specification

- Transducer:
- Generator:
- Ultrasonic Power:
- Thickness:
- Frequency:
- Wiring Methods:
- Highlight:

18pcs Yes; 900W 900W 2.5mm 28/40khz Rigid Tube

Submersible Ultrasonic Transducer SUS, 2.5mm Submersible Ultrasonic Transducer, custom Immersible Ultrasonic Transducer





Product Description

1500W Submersible Ultrasonic Transducers For Cleaning Heat Exchanger

Parameter:

Model No.	JP-1018I								
Function	Ultrasonic Cleaning								
Ultrasonic Frequency	28/40KHz								
Material	SUS304								
Transducer	18pcs								
Time setting	1-99 hours adjustable								
Power Supply	AC220V/ 50Hz								
Ultrasonic Power	900W (40%-100% adjuatable)								
Box Size (LxWxH)	340*280*100mm (L*W*H)								
Generator	1 set								
Wire method	Rigid tube connect to box								
N.W./G.W.	25KG/30KG Packed by plywood box								
Quantity	1pcs								
Other size for you	r choice:								

Model	Tube Size	Transduc ers	Ultrasonic Power	Weight	Frequency	Generator
	(D*H)mm	(pcs)	(W)	(KG)	(Khz)	(set)
JM-1003	57*180	3	150	3	28/40	1
JM-1006	57*300	6	300	5	28/40	1
JM-1012	57*550	12	600	10	28/40	1
JM-1018	57*750	18	900	15	28/40	1
JM-1024	57*1000	24	1200	20	28/40	1
JM-1036	57*1520	36	1800	30	28/40	1

Model	Plate Size	Transduce rs	Ultrasonic Power	Generator	Frequency	Sample Price	2-20pcs
	(L*W*H)mm	(pcs)	(W)	(set)	(KHz)	(\$)	(\$)
JP-1006I	305*205*100	6	300	1	28/40	430	385
JP-1012I	355*305*100	12	600	1	28/40	550	465
JP-1018I	340*280*100	18	900	1	28/40	600	525
JP-1024I	430*280*100	24	1200	1	28/40	680	630
JP-1030I	460*370*100	30	1500	1	28/40	750	700
JP-1036I	550*450*100	36	1800	1	28/40	840	775
JP-1048I	600*450*100	48	2400	1	28/40	1220	1130

Feature:

1. The default frequency is 28/40KHz, if need other frequency(20/68/80/132KHz), then need to quote.

2. Tank material is SUS304, if need SUS316, then price is 20% higher


3. There is no Skymen Logo for this series machine on sale, can put customer's logo, MOQ is 2pcs.

4. This series machine is mainly for distributor to take up market.


5. All the box can be put in water to working directly, customer needs to weld tank by himself.

Actual usage scenarios



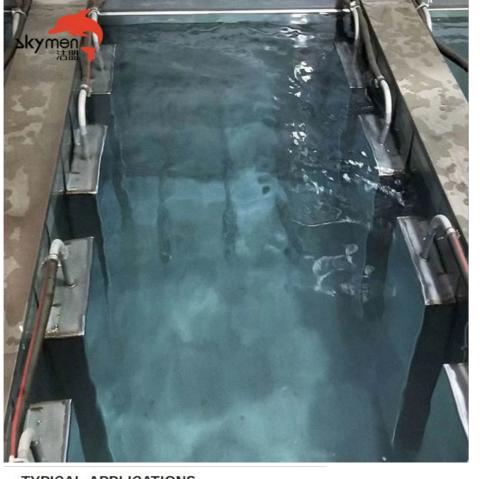

TYPICAL APPLICATIONS

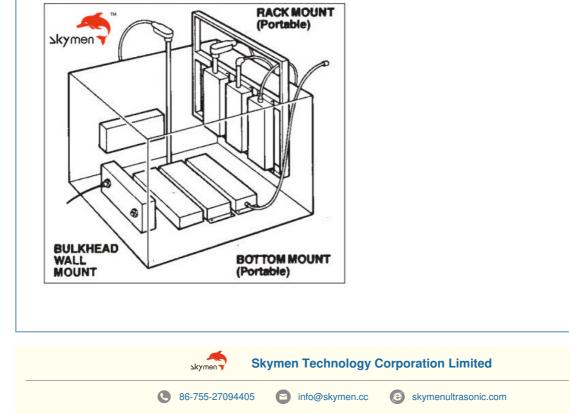

Floor 1st & 2nd, Building 3, Tanggang Taifeng Industrial Park, Dawangshan Community, Shajing Street, Bao'an District, Shenzhen