




40 / 28 Khz Industrial Ultrasonic Cleaner 100L For Precise Instruments

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: SkyMen
- Certification: CE
- Model Number: JTS-1030
- Minimum Order Quantity: 1pcs
- Price: Negotiation
- Packaging Details: 1sets/ wooden case
- Delivery Time: In Stock
- Payment Terms: Paypal / T/T / western Union
- Supply Ability: 600pcs per month

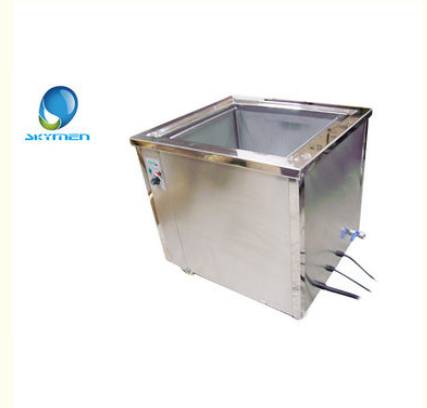

Product Specification

- Product Name: Ultrasonic Cleaner
- Application: Precise Instruments
- Capacity: 100 Liter
- Ultrasonic Power: 1500W
- Timer: 1~99 Hours
- Feature: Power Adjustable
- Highlight: **ultrasonic cleaning device,
ultrasonic washing machine,
Industrial Ultrasonic Cleaner 100L**

Product Description

40 / 28 Khz Industrial Ultrasonic Cleaner For Precise Instruments

Specification details:

Tank's working dimension (mm):500*406*500(L*W*H)
 Overall dimension (mm):710*586*720 (L*W*H)
 Tank's total capacity: 101L
 Tank's material: SUS304 / SUS316L
 In-tank surface finishing: Hard-Cr Plating Treatment (20+ microns)
 Housing's material: Stainless steel
 Ultrasonic frequency: 28kHz / 40kHz
 Ultrasonic transducer: 30
 Ultrasonic output power (MAX.): 1500W
 Electronic generator: KG1500
 Heater's (hot plate) power: 4.5kW
 Cleaning tank's power requirement: AC 220V / 240V, 1, 25AMP

Specifications:

Model	JTS-1030
Tank's working dimension (mm)	500*406*500(L*W*H)
Overall dimension (mm)	680*586*850(L*W*H)
Tank's total capacity	100L
Tank's material	SUS304 / SUS316
In-tank surface finishing	Hard-Cr Plating Treatment (20+ microns)
Housing's material	Stainless steel
Ultrasonic frequency	28kHz / 40kHz
Ultrasonic transducer	30pcs
Ultrasonic output power (MAX.)	1500W
Electronic generator	KG1500
Heater's (hot plate) power	4.5KW

Description:

Adjustable ultrasonic power
 Original BLT type transducer
 SUS304/316L tank
 Adaptable for continuous operation
 Adjustable thermo controller
 Adjustable ultrasonic power
 With separate control ultrasonic electronic generator
 Sweep mode control available
 Digital timer control
 Boost mode& oil skimmer upon client's requirement
 Pressure pump and filter system are available.

Competitive Advantage:

Material : SUS304/316L with 2mm thickness
 15 years experience engineer will design the machine for you
 Filtration System: for heavy duty oil removing, cycle cleaning solvent, prevent second pollution and better cleaning effects.
 PCB Board: manufactured by Skymen factory, more stable

Skymen JTS Series:

Skymen Model No.	JTS-1030	JTS-1036	JTS-1060	JTS-1072	JTS-1108	JTS-1144
TANK DIMENSION(mm)	500x406x500	500x460x550	700x650x650	1000x600x600	1000x900x600	1200x1000x800
OVERALL DIMENSION(mm)	680x586x850	680x640x900	900x850x1000	1200x800x950	1240x1140x950	1440x1240x1150
MAX. CAPACITY	101L	126L	295L	360L	540L	960L

CONSTRUCTION CASE	SUS 304 (MIRROR SHINING IMAGE AVAILABLE)					
CONSTRUCTION TANK	SUS 304 / 316L					
ULTRASONIC POWER(MAX.)	1500W	1800W	3000W	3600W	5400W	7200W
ULTRASONIC FREQUENCY	28kHz/40kHz/68kHz/80kHz/120kHz					
MAX. HEATING TEMP.	20~80C ADJUSTABLE					
HEATING POWER	3KW	4.5KW	6KW	9KW	12KW	24KW
TIMER	0~30min adjustable					
DRAIN	¾" VALVE					
LID & BASKET	TAKE-OFF / STRUT LID; SUS 304					
CLEANING TANK'S POWER REQUIREMENT	AC220V/380V/415V/440V. 3					
GENERATOR'S POWER REQUIREMENT	AC110V/ 220V / 240V, 1					
GENERATOR	WITH SWEEP MODE AND REMOTE CONTROL					
FEATURES	MULTI-DIRECTION CASTORS WITH BRAKE; 1 YEAR WARRANTY					
Optional	FILTRATION SYSTEM (PUMP, SUS FILTER, OIL CATCH CAN)					

Q: How often should I change the cleaning fluid in my tank?

A: Changed whenever it becomes visibly too contaminated, or when the cleaning process is not as effective.

Q: Why do I need to use a basket?

A: Basket would help to load objects together, and get better cleaning effect.

Q: Can ultrasonic cleaning damage parts?

A: Although the effect of thousands of implosions per second is very powerful, the cleaning process is safe.
No damage to your daily objects.



Skymen Technology Corporation Limited



86-755-27094405



info@skymen.cc



skymenultrasonic.com

Floor 1st & 2nd, Building 3, Tanggang Taifeng Industrial Park, Dawangshan Community, Shajing Street, Bao'an District, Shenzhen