

Industrial Ultrasonic Cleaner 40L Tank 380V for Auto Parts Degreasing

Our Product Introduction

for more products please visit us on skymenultrasonic.com

Basic Information

- Place of Origin: Guangdong, China
- Brand Name: Skymen
- Minimum Order Quantity: 1
- Price: \$1,980




Product Specification

- Power: 4W
- Dimensions: 800*300*400cm
- Weight: 155kg
- Voltage: 380V, 220V
- Tank Capacity: 40L
- Basket Diameter: 500mm
- Workplace Height: 300mm
- Cavity Material: SUS304/ 1.5mm
- Basket Load-bearing: 50kg
- Basket Rotation Drive: Spray Drives Rotation
- Secondary Tank Capacity: 40L
- Heating Power: 3KW
- Water Pump Power: 0.55KW
- Spray Pressure: 0.25 MPA
- Model: JP-0500ZP



More Images



Product Description

High Quality High Pressure Rotary Spray Washer Industrial Ultrasonic Cleaner for Auto Parts Engine Block

Product Specifications

Attribute	Value
Machine Type	Industrial Ultrasonic Cleaner
Condition	New
Fuel	Electric
Use	Degreasing
Cleaning Process	Solvent Cleaning
Cleaning Type	Immersion / Soak
Material	Metal / Coil
Power (W)	4
Dimension (L*W*H)	800*300*400cm
Warranty	1 Year
Weight (kg)	155
Voltage	380V , 220V
Tank Capacity	40L
Tank Dimensions	Customized
Includes Timer	Yes
Model	JP-0500ZP
Basket Diameter	500mm
Workplace Height	300mm
Cavity Material	SUS304/ 1.5mm
Basket Load-bearing	50kg
Basket Rotation Drive	Spray drives rotation
Secondary Tank Capacity	40L
Heating Power	3KW
Water Pump Power	0.55KW
Spray Pressure (MPa)	0.25

Product Overview

This industrial-grade ultrasonic cleaner features high-pressure rotary spray technology for thorough cleaning of auto parts and engine blocks. The robust construction with SUS304 cavity material ensures durability in demanding industrial environments.

Product Images



High Pressure Rotary Spray Cleaning Machine

- High-pressure spray
- SUS materials
- Noise reduction
- Filtration cycle
- 360° cleaning
- Easy to operate



High Pressure Spray Device

The high-pressure water pump is used to pressurize the cleaning fluid to form a high-speed, high-pressure jet that impacts metal shavings, dust, cutting fluid, grease, etc. on the surface of the workpiece to separate the dirt and achieve the purpose of cleaning.

Adjustable spray pressure


All-round cleaning



Rotating Cleaning Basket

The basket is made of stainless steel, with strong load-bearing capacity and durability.

Removable maintenance, easy to clean.

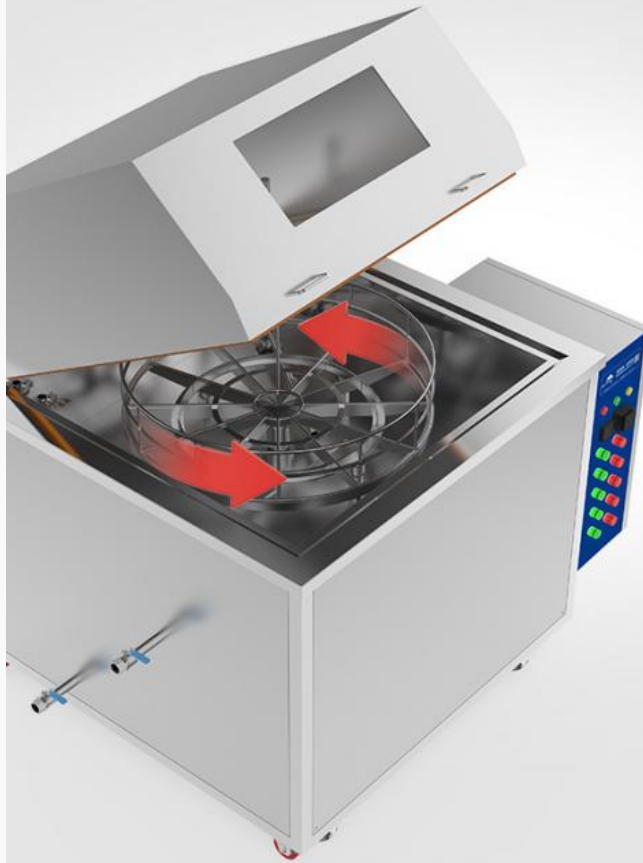

3-10 circles/min
Adjustable speed



Quick
disassembly



Stainless Steel Body

High temperature resistance, oxidation resistance, acid & alkali corrosion resistance, with long service life.

Button Control

Simple, intuitive, and easy to operate, with an emergency button that can be quickly cut off in special situations.

*Customizable PLC+touch screen control.



Circulation Filtration System

Micron-level filter effectively filters floating oil dirt and particles, reducing the frequency of cleaning fluid replacement.


Sealed Silencer Lid

Equipped with a gas strut to assist in opening and closing, so that the lid can open easily and close tightly.

Silicone Sealing Strip

Fits tightly to the edge of the lid, prevents liquid leakage, eliminates noise.

*Optional configuration: transparent observation window + internal LED lighting for easy observation of cleaning conditions.

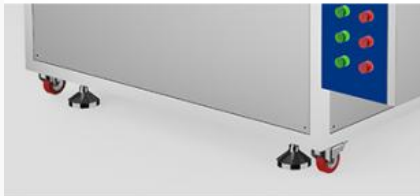


Manual Hydraulic Gun (optional)

Manual assisted cleaning, suitable for special structure of the workpiece, improve the cleaning effect.

Manual Air Gun (optional)

Can be connected to an air compressor to quickly blow away residual liquid on the surface and speed up the drying of the workpiece.

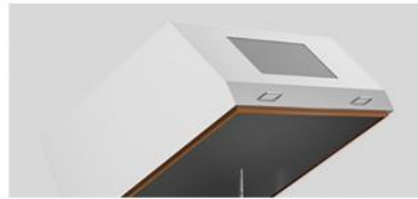

Fixed Foot Stand

Made of high-strength material, stable and reliable.

Flexible Universal Wheel

Flexible steering makes it easy to push, and the equipment can be easily moved to the required position, improving maneuverability.



Parameters

Model	Unit Size (mm)	Basket Size (mm)	Basket Load-bearing	Rotating Speed(rmp)	Heating Power(kw)	Spray Pressure(bar)	Filtration
JP-0500ZP	800*800*750	Φ500*300	50kg	-	3	2.5	Two-stage filtration
JP-0600ZP	900*900*750	Φ600*350	50kg	-	3	2.5	Two-stage filtration
JP-0500P	800*800*750	Φ500*300	80kg	3-10	3	2.5	Two-stage filtration
JP-0600P	900*900*750	Φ600*350	80kg	3-10	3	2.5-3	Two-stage filtration
JP-0700P	1000*800*750	Φ700*350	80kg	3-10	3	3	Two-stage filtration
JP-0800P	1100*1100*900	Φ800*500	250kg	3-10	6	3	Two-stage filtration
JP-0900P	1200*1200*900	Φ900*500	250kg	3-10	6	3	Two-stage filtration
JP-1000P	1300*1300*1100	Φ1000*700	250kg	3-10	6	3	Two-stage filtration
JP-1200P	1500*1500*1100	Φ1200*700	350kg	3-10	9	3	Two-stage filtration
JP-1500P	1800*1800*1250	Φ1500*850	400kg	3-10	9	3	Two-stage filtration
JP-2000P	2300*2300*1400	Φ2000*1000	600kg	3-10	12	3	Two-stage filtration

* The above parameters are for reference only. Please consult customer service staff for more product information.

Frequently Asked Questions

How about after sales services?

12 months warranty for SKYMEN ultrasonic cleaner. Any technical problem during warranty time, free replacement parts will be sent to your door. And technical support is also available after 1 year.

What are advantages of ultrasound over traditional cleaning methods?

Minimizes the use of manual labor

Makes cleaning and degreasing without the use of organic solvents

Reaches every area of product and remove all types of dirt

Shortens processes such as extraction, dispersion, purification, and chemical reactions

Eliminates costly mechanical and chemical cleaning of heat exchangers

Will ultrasonic cleaning damage item's parts?

Ultrasonic cleaning is considered as safe cleaning way for most parts; In some cases, it is necessary to observe carefully. The effect of thousands of implosions per second is very powerful, and the cleaning process is safe.



Skymen Technology Corporation Limited



86-755-27094405



info@skymen.cc



skymenultrasonic.com

Floor 1st & 2nd, Building 3, Tanggang Taifeng Industrial Park, Dawangshan Community, Shajing Street, Bao'an District, Shenzhen