

Engine Metal Parts Industrial Ultrasonic Cleaner

Basic Information

. Place of Origin: China skymen . Brand Name: CE · Certification: JTS-1144 Model Number:

• Minimum Order Quantity:

• Price: Negotiation

· Packaging Details: 1pcs / wooden case packing

• Delivery Time: In Stock • Payment Terms: T/T, , L/C 100 /month . Supply Ability:



Product Specification

• Material: Stainless Steel SUS304/316L

• Use: Cleaning, Degreasing

To Clean Oil, Carbon, Rust, sludge . Application:

Oil Filter System • Optional: Multi Tank · Special: • Ultrasonic Frequency: 28khz/40khz • Ultrasonic Power: 3000W

Function: Cleaning Rinsing Heater: 20 To 80 Asjudt

• Highlight: automotive ultrasonic cleaner,

ultrasonic washing machine



More Images











Product Description

Skymen CE approved heavy duty industrial Ultrasonic Cleaner for engine metal parts and hardware 300L Industrial Ultrasonic Cleaner Machine Diesel Particulate Filter

The machine is customized and certified with CE and RoHS. If need, rising tank or drying tank is optional based on customer's needs. Large Capacity for Diesel Particulate Filter Cleaning





Applications:

Skymen Dual frequency ultrasonic cleaner can be use for car parts washing, engine block degrease, radiator clean, also can clean electronic parts. No damage to object surface and improve cleaning efficiency.














Specifications:

Model JTS-1060

Tank's working dimension (mm)	700*650*650(L*W*H)
Overall dimension (mm)	900*850*1000(L*W*H)
Tank's total capacity	300L
Tank's material	SUS304 / SUS316
In-tank surface finishing	Hard-Cr Plating Treatment (20+ microns)
Housing's material	Stainless steel
Ultrasonic frequency	28kHz / 40kHz
Ultrasonic transducer	60pcs
Ultrasonic output power (MAX.)	3000W
Electronic generator	KG3000
Heater's (hot plate) power	9KW

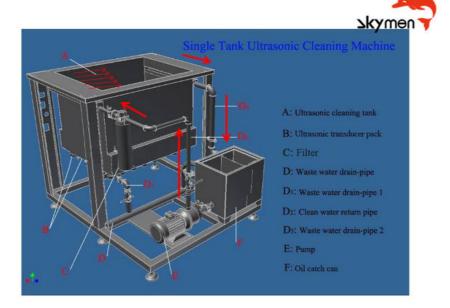

Product Description

Model: Skymen™		JTS- 1012	JTS-	1018	JTS- 1024	JTS- 1030	JTS- 1036	JTS- 1072	
TANK'S WORKING DIMENSION (mm)	L1	355	406		500	500	500	1110	
	W1	305	305		355	406	460	600	
	H1	355	460		500	500	550	600	
OVERALL DIMENSION (mm)	L2	535	586		680	710	710	1320	
	W2	485	85 485		535	586	640	780	
	H2	750	680		720	720	770	820	
TANK'S TOTAL CAPACITY		38L	56L		88L	101L	126L	369L	
TANK'S MATERIAL		SUS304 / SUS316L							
IN-TANK SURFACE FINISHING		Hard-Cr Plating Treatment (20+ microns)							
HOUSING'S MATERIAL		Stainless steel							
ULTRASONIC FREQUENCY*		28kHz / 40kHz							
ULTRASONIC TRANSDUCER		12	18		24	30	36	72	
ULTRASONIC OUTPUT POWER (MAX.)		600W	900W		1200W	1500W	1800W	3600W	
ELECTRONIC GENERATOR		KG600	KG900		KG120 0	KG150 0	KG180 0	KG3600	
		Build-in Separate							
HEATER'S (HOT PLATE) POWER		1.5kW		3kW			4.5kW	9KW	







Description:

Adjustable ultrasonic power Original BLT type transducer SUS304/316L tank Adaptable for continuous operation
Adjustable thermo controller
Adjustable ultrasonic power
With separate control ultrasonic electronic generator
Sweep mode control available
Digital timer control
Boost mode& oil skimmer upon client's requirement
Pressure pump and filter system
With pneumatic lift to up and down goods.

Packing , loading, delivery time				
Packing unit	1set/wooden case			
Packing method	Export wooden case			
Loading port	Shenzhen			
Delivery time	About 15 working days			
Minimum Order Quantity	1set			
Transport method	By express company / air / sea			





Competitive Advantage: Material: SUS304/316L with 2mm thickness

15 years experience engineer will design the machine for you Filtration System: for heavy duty oil removing, cycle cleaning solvent, prevent second polution and

better cleaning effects.

PCB Board: manufactured by Skymen factory, more stable



Skymen Technology Corporation Limited



86-755-27094405



info@skymen.cc



skymenultrasonic.com

Floor 1st & 2nd, Building 3, Tanggang Taifeng Industrial Park, Dawangshan Community, Shajing Street, Bao'an District, Shenzhen