

Shenzhen, China

RoHS, CE, FCC, SGS

Skymen

JP-2072T

Negotiation

In Stock

Wooden case

800 pcs per month

1

Double Tanks 330L Vertical Ultrasonic Blind Cleaning Machines 40KHz

Basic Information

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity:
- Price:
- Packaging Details:
- Delivery Time:
- Payment Terms: T/T
- Supply Ability:



Product Specification

- Model:
- First Tank Volume:
- First Tank Size:
- Transducers:
- Ultrasonic Power:
- Heating Power:
- Function:
- Frequency:
- Highlight:

JP-2072T
330L
3000X220X500mm
72pcs, 50W Of Every Transducer
3600W
9000W
Ultrasonic Clean+rinsing+drying
28/40KHz

Vertical Ultrasonic Blind Cleaning Machines, Ultrasonic Blind Cleaning Machines 40KHz, 330L Double Tanks Ultrasonic Cleaner



More Images



Double Tanks Blinds Curtain 3600W Ultrasonic Cleaning Machine with Drain Holder 28/40KHz

The advantages of the ultrasonic cleaning machine are: the ultrasonic cleaning effect is good, and the operation is simple. The sound that people hear is the acoustic signal with a frequency of 20-20000 Hz. The sound wave higher than 20000 Hz is called ultrasonic wave. The transmission of sound wave propagates longitudinally according to the sinusoidal curve, generating a large number of small bubbles. One reason is that a tensile stress is locally generated in the liquid to form a negative pressure. The decrease in pressure causes the gas originally dissolved in the liquid to be supersaturated, and escapes from the liquid to become small bubbles; another reason is that the strong tensile stress tears the liquid. "Become a hollow, called cavitation.

Same series	with	different	size	for	your	choice:
-------------	------	-----------	------	-----	------	---------

Model	1st tank volume	1st tank size		Transducer s	Ultrasonic Power	Heating power	Frequenc y			
JP- 2036T	160L	2000*200*400 mm		36pcs	1800W	4500W	28/40KHz			
JP- 2060T	264L	2400*220*500 mm		60pcs	3000W	6000W	28/40KHz			
JP- 2072T	330L	3000*220*500 mm		72pcs	3600W	12000W	28/40KHz			
Specifica	tion									
Model			JP-2072T							
1st Tank Volume			330L Ultrasonic Cleaning tank with filtration cycle system							
			330L Ultrasonic Rinsng tank							
1st tank size 3			3000*220*500mm							
			3000*220*500mm							
			72pcs							
Ultrasonic Power 3			3600W							
Heating Power of Ultrasonic tank		12000W								
Frenquency		28KHz/40KHz								
Timer		0~99 minutes adjustable								
Heater		Room temperature~99°C adjustable								
Material S		SUS 304 default, can be SUS 316								
Power Supply AC		AC 220V 3 phase ; AC 380V 3 phase								
N.W. 300G										
G.W.			Wrapped by film in wooden case							
		king days								
			ear warranty period, technique support all time							
		CE, RoHS, FCC, SGS								
Advantage			Filter the dirty water; keep the water clear in tank; lower the frequency of changing water							

Feature:

1. It's designed for cleaning blind curtains.

2. There are 2 tanks, one is for Ultrasonic clean with heating function, you


can put chemicals in it to clean, another is rinsing tank for removing the

chemicals from curtain.

3. There is a high holder to support the blind curtain, and a leachate frame to hold the wet curtain

Images:



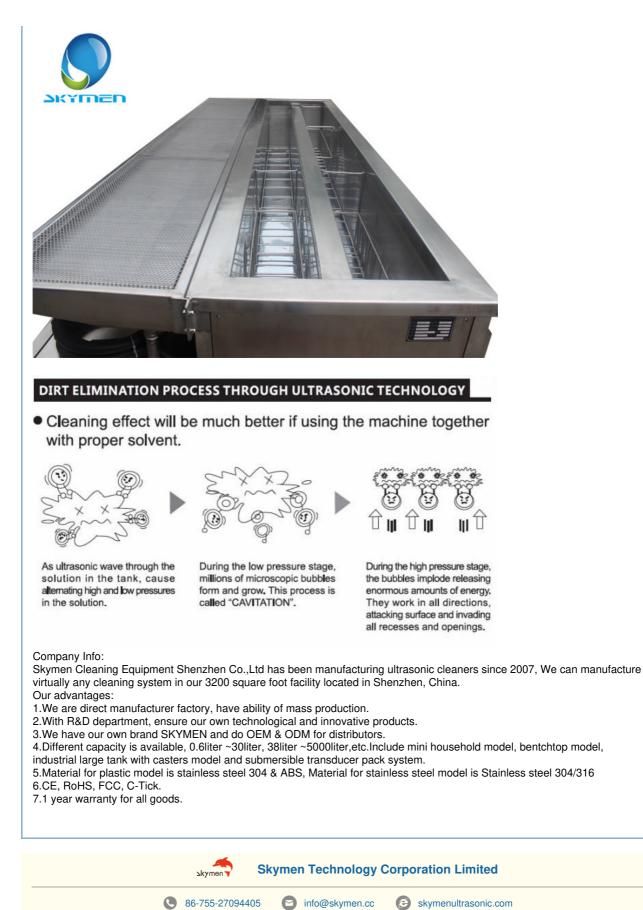

Floor 1st & 2nd, Building 3, Tanggang Taifeng Industrial Park, Dawangshan Community, Shajing Street, Bao'an District, Shenzhen