

## 99L Dpf Three Tank Ultrasonic Cleaner 3000W Sky men JP-3060GH

### Our Product Introduction

#### Basic Information

- Place of Origin: Shenzhen, China
- Brand Name: Sky men
- Certification: RoHS, CE, FCC, SGS
- Model Number: JP-3060GH
- Minimum Order Quantity: 1
- Price: Negotiation
- Packaging Details: Wooden case
- Delivery Time: In Stock
- Payment Terms: T/T
- Supply Ability: 800 pcs per month



#### Product Specification

- Model: JP-3060GH
- Tank Volume: 99L
- Ultrasonic Power: 3000W
- Heating Power: 3000W
- Frequency: 40KHz/28KHz
- Filter Cycle System: 1 Set
- Highlight: **Dpf Three Tank Ultrasonic Cleaner,  
99L Three Tank Ultrasonic Cleaner,  
3000W Industrial Ultrasonic Cleaning Baths**

## Product Description

### Skymer JP-3060GH 99L 3000W Dpf Three Tank Industrial Ultrasonic Cleaner Baths Cleaning

#### PRODUCT SPECIFICATIONS

| No |                 |  |
|----|-----------------|--|
| 1  | Model           | JP-3060GH (Ultrasonic Cleaning + Filter+ Rising+ Hot Air Drying) |
| 2  | 1st Tank        | Function   |
|    |                 | Ultrasonic Cleaning + Filter                                     |
|    |                 | Ultrasonic Frequency   |
|    |                 | 28/40kHz (other frequency can be customized)                     |
|    |                 | Tank Material  |
|    |                 | SUS 304 (SUS 316 can be customized)                              |
|    |                 | Inner tank dimension   |
|    |                 | 550*450*400mm  |
|    |                 | Tank Capacity  |
|    |                 | 77L  |
|    |                 | Transducer   |
|    |                 | 48pcs  |
|    |                 | Ultrasonic Power   |
|    |                 | 1500W  |
|    |                 | Heating Power  |
|    |                 | 4500W  |
|    |                 | Time setting of Ultrasonic                                       |
|    |                 | 0~99 hours   |
|    |                 | Temperature setting  |
|    |                 | Room temperature ~ 95°C adjustable                               |
|    |                 | Thickness of tank  |
|    |                 | 1mm  |
|    |                 | Drain value  |
|    |                 | Yes, in the right side of machine                                |
|    |                 | Water inlet/outlet   |
|    |                 | Yes  |
|    |                 | Filter   |
|    |                 | 1 set, connect with 1st tank                                     |
|    |                 | Generator  |
|    |                 | 1 set  |
|    |                 | Lid  |
|    |                 | Yes, hinged with machine body, with gasket                       |
|    |                 | Basket load  |
|    |                 | 200KG  |
| 3  | 2nd tank        | Function   |
|    |                 | Ultrasonic Cleaning + Rising                                     |
|    |                 | Inner tank dimension   |
|    |                 | 550*450*400mm  |
|    |                 | Ultrasonic Power   |
|    |                 | 1500W  |
|    |                 | Heating Power  |
|    |                 | 4500W  |
| 4  | 3rd tank        | Function   |
|    |                 | Hot Air Drying   |
|    |                 | Inner tank dimension   |
|    |                 | 550*450*400mm  |
|    |                 | Dryer Power  |
|    |                 | 3000W  |
| 5  | Warranty        | 1 year warranty for spare parts, all life technical support      |
| 6  | Certificate     | CE, RoHS; FCC, REACH   |
| 7  | Production time | 5 days if there is stock; 20 days if there is no stock           |

#### PRODUCT CONFIGURATION





Sales Center in Fuyong ,ShenZhen City ,GuangDong Province



R&D Center in Sha jing,Shenzhen City,Guang Dong Province



Production Base in WuJiang ,Shao Guan City ,Guang Dong Province

# Upgrade Interface

## U L T R A S O N I C   C L E A N E R



01

Button Or PLC Control  
Selectable

02

Drain Valve

Equipped With Inlet  
And Drainage Valves



03

Cylinder head  
concave design

Cylinder head concave  
design-Beautiful  
Tight Handle Lid





**04**

Stainless steel outer  
plate



**05**

Good load-bearing  
effect

More Support Chip  
In Inner Tank  
Better Bearing Load



**06**

Cleaning basket

Stainless Steel Cleaning  
Basket





07

## Universal Casters

Universal Casters  
Convenient For Moving

08

## Generator

Independent research  
and development of  
ultrasonic generator  
Stable Output



## Details Specification

| Model     | Tank Size(mm)  | Capacity | Timer | Frequency | Transducer pcs | Ultrasonic Power | Heating Power | Filtration | Drying Power | Drying Temperature |
|-----------|----------------|----------|-------|-----------|----------------|------------------|---------------|------------|--------------|--------------------|
| JP-3024GH | 500X300X250    | 38L      | 1-99h | 40/28KHz  | 24             | 600W*2           | 1.5KW*2       | YES        | 3000W        | 20-150°C           |
| JP-3036GH | 500X350X300    | 53L      | 1-99h | 40/28KHz  | 36             | 900W*2           | 1.5KW*2       | YES        | 3000W        | 20-150°C           |
| JP-3048GH | 550X400X350    | 77L      | 1-99h | 40/28KHz  | 48             | 1200W*2          | 3KW*2         | YES        | 3000W        | 20-150°C           |
| JP-3060GH | 550X450X400    | 99L      | 1-99h | 40/28KHz  | 60             | 1500W*2          | 3KW*2         | YES        | 4500W        | 20-150°C           |
| JP-3061GH | 800X300X400    | 96L      | 1-99h | 40/28KHz  | 30             | 1500W*2          | 3KW*2         | YES        | 4500W        | 20-150°C           |
| JP-3072GH | 600X500X450    | 135L     | 1-99h | 40/28KHz  | 72             | 1800W*2          | 4.5KW*2       | YES        | 4500W        | 20-150°C           |
| JP-3096GH | 700X500X500    | 175L     | 1-99h | 40/28KHz  | 96             | 2400W*2          | 6KW*2         | YES        | 6000W        | 20-150°C           |
| JP-3120GH | 800X600X550    | 264L     | 1-99h | 40/28KHz  | 120            | 3000W*2          | 6KW*2         | YES        | 6000W        | 20-150°C           |
| JP-3144GH | 1000*600*600   | 360L     | 1-99h | 40/28KHz  | 144            | 3600W*2          | 9KW*2         | YES        | 6000W        | 20-150°C           |
| JP-3168GH | 1500X700X400   | 420L     | 1-99h | 40/28KHz  | 168            | 4200W*2          | 15KW*2        | YES        | 6000W        | 20-150°C           |
| JP-3192GH | 1200X500X800   | 480L     | 1-99h | 40/28KHz  | 192            | 4800W*2          | 15KW*2        | YES        | 9000W        | 20-150°C           |
| JP-3216GH | 1000X900X600   | 540L     | 1-99h | 40/28KHz  | 216            | 5400W*2          | 18KW*2        | YES        | 9000W        | 20-150°C           |
| JP-3240GH | 1000X800X800   | 640L     | 1-99h | 40/28KHz  | 240            | 6000W*2          | 18KW*2        | YES        | 9000W        | 20-150°C           |
| JP-3264GH | 1000X1000X800  | 800L     | 1-99h | 40/28KHz  | 264            | 6600W*2          | 24KW*2        | YES        | 12000W       | 20-150°C           |
| JP-3288GH | 1200X1000X800  | 960L     | 1-99h | 40/28KHz  | 288            | 7200W*2          | 30KW*2        | YES        | 12000W       | 20-150°C           |
| JP-3432GH | 1500X1000X1000 | 1500L    | 1-99h | 40/28KHz  | 432            | 10800W*2         | 36KW*2        | YES        | 18000W       | 20-150°C           |

# Application Industry

Applied To Hardware,Electronic,Auto Parts,Optical,Semiconductor  
New Energy, Aeronautics And AstronauticsRail Traffic  
Petrochemical, etc



Hardware




The Electronics Industry



Auto Parts



Optical Industry



Semiconductor Industry



New Energy



Aeronautics And  
Astronautics



Rail Transportation



Petrochemical Industry



# The Reason For Choosing Us

## U L T R A S O N I C   C L E A N E R



Skymen Brand Ultrasonic Cleaner  
Button Panel, Concise and Saving  
Effort

VS



Other Brand, Inconvenient Operation



Skymen Brand Concave cylinder  
Mouth design, No Overflowing Water  
good noise elimination

VS



Other brand cleaning machine flat  
cylinder mouth, water is easy to  
splash out



Skymen brand using self-developed  
ultrasonic generator, digital  
automatic frequency scanning  
stable output

VS



Other Brands, Using older  
mechanical generators



# Cleaning Comparison Example

No contrast, no harm

Before cleaning



After cleaning



Before cleaning



After cleaning



Before cleaning



After cleaning



Before cleaning



After cleaning





Sales team 80+



R&D team 20+



Factory employees, 500+

## Advantage

Craftsman spirit, to create product quality, customized product production base



### Product licensing

To Be Our Partner, enjoying product authorization

### Support customization

Large Warehouse of 3000 Square Meters, product wholesale





### **Spot wholesale**

Large Warehouse of 3000 Square Meters, product wholesale  
Product wholesale ,No need to worry

### **OEM manufacturer**

Mutual cooperation



### **Project research and development**

Custom design Mould Research  
And Development  
Mutual cooperation



## Strict quality inspection

Self-inspection team detection, real-time sampling of each process



## Manufacturing process



### Applications:

Commonly used in precision hardware, electronics, semiconductors, watches, jewelry, energy, optics, medicine, automotive manufacturing, electroplating, painting and vacuum coating pretreatment.



Industrial cleaning equipment, ultrasonic cleaning machines are widely used in precision hardware, electronics, semiconductors, watches, jewelry, energy, optics, medicine, automotive manufacturing, electroplating, painting and vacuum coating pretreatment. It is especially suitable for parts with complex surface shapes. Applications

Commonly used in precision hardware, electronics, semiconductors, watches, jewelry, energy, optics, medicine, automotive manufacturing, electroplating, painting and vacuum coating pretreatment.

Industrial cleaning equipment, ultrasonic cleaning machines are widely used in precision hardware, electronics, semiconductors, watches, jewelry, energy, optics, medicine, automotive manufacturing, electroplating, painting and vacuum coating pretreatment. It is especially suitable for parts with complex surface shapes.

#### SIMILAR PRODUCTS

| Model            | Tank size<br>(mm)  | Capacity<br>(L) | Transducer<br>(pcs) | Ultrasonic power<br>(W) | Heating power<br>(W) | Frequency<br>(kHz) | Generator<br>(set) |
|------------------|--------------------|-----------------|---------------------|-------------------------|----------------------|--------------------|--------------------|
| JP-3024GH        | 500*300*250        | 38              | 24                  | 600*2                   | 1500*2               | 28/40              | 1                  |
| JP-3036GH        | 500*350*300        | 53              | 36                  | 900*2                   | 1500*2               | 28/40              | 1                  |
| JP-3048GH        | 550*400*350        | 77              | 48                  | 1200*2                  | 3000*2               | 28/40              | 1                  |
| <b>JP-3060GH</b> | <b>550*450*400</b> | <b>99</b>       | <b>60</b>           | <b>1500*2</b>           | <b>4500*2</b>        | <b>28/40</b>       | <b>1</b>           |
| JP-3072GH        | 600*500*450        | 135             | 72                  | 1800*2                  | 4500*2               | 28/40              | 1                  |
| JP-3096GH        | 700*500*500        | 175             | 96                  | 2400*2                  | 6000*2               | 28/40              | 2                  |
| JP-3120GH        | 800*600*550        | 264             | 120                 | 3000*2                  | 6000*2               | 28/40              | 2                  |
| JP-3144GH        | 1000*600*600       | 360             | 144                 | 3600*2                  | 9000*2               | 28/40              | 2                  |
| JP-3216GH        | 1000*900*600       | 540             | 216                 | 5400*2                  | 18000*2              | 28/40              | 3                  |
| JP-3288GH        | 1200*1000*800      | 960             | 288                 | 7200*2                  | 24000*2              | 28/40              | 4                  |

#### FAQ

##### Q1.:Can ultrasonic cleaning damage my parts?

A1: Don't worry, no any damage to your objects, but you should choose different models when cleaning different things, I recommend you to clean your jewelry by our home use Ultrasonic cleaner. Or you can consult us if you have no idea of choosing which model.

##### Q2: Why is a special solution required for cleaning?

A2: The heavy oil and grease is very adherent, the oil cannot be removed very well without detergent, the detergent can emulsify the the oil and grease, then Ultrasonic can remove the oil very easy.

##### Q3: What cleaning solution should I use?

A3: Stronger acid and stronger alkali are forbidden, because stronger acid and stronger alkali will corrode the tank of machine, our tank material is SUS304, after long time using of stronger acid and stronger alkali, the tank will be damaged. For selecting the detergent, you could consult your local detergent company or supermarket, they can give you more professional advice. We are manufacturer of machine, not very skillful in the selecting of detergent. And the export of detergent in China is very strict.

##### Q4: What cleaning solution shouldn't I use?

A4: Flammables or solutions with low flash points should never be used. The energy released by bubbles may be exploded for flammable liquids. Strong alkali and Acids should be avoided; they will damage stainless steel tanks.

##### Q5: What's advantage of Skymen ultrasonic cleaner?

A5: Skymen ultrasonic cleaner is the nice way to have thorough cleaning without damaging objects. It has the functions of cleaning, disinfecting, degreasing, descaling, stripping, burnishing, deflashing, removing rust, dust, oil, etc. make them look new again. It's very safe and easy to operate, proves to be a nice helping hand for you.

##### Q6: Why do I need to use a basket?

A6: Basket would help to load objects together, and get better cleaning effect.

##### Q7: What frequency is better for my parts?

A7: Frequency is suggested based on pollutants in the objects. 28kHz frequency is stronger, better for car/motor/truck/vessel parts clean(remove oils, grease, pastes, etc. ) 40kHz is better for pcb boards, electronic or other precision parts, etc. Higher precision goods, higher frequency.

##### Q8: What about the warranty?

A8: 1 Year warranty for For all ultrasonic cleaner. If any technical problem during warranty time, replacement parts will be sent free of charge. And technical support is also available after 1 year

##### Q9: How do I get the nice ultrasonic cleaning?

A9: Choosing the proper cleaning solution is one of the most important decisions, as well as cleaning at the right temperature, 50~60°C can achieve best cleaning effect. cleaning time, and choosing the suitable size and type of ultrasonic cleaner.



## INDUSTRIAL ULTRASONIC CLEANER SERIES



Auto



Aircraft



Marine



Electronic



Catering



What functions can we make?




PLC



Lifting



Spraying



Condensation



Bubbling



Agitation



Filtration



Drying





### Features

1. Digital LED screen display
2. Fast and effective cleaning, convenient for users
3. Clean rings, earrings, necklaces, new features of diamonds,
4. Use only tap water or add a small amount of detergent for better cleaning
5. The cleaning effect is obvious
6. Cleaning items shine like new ones
7. Compact cover design to reduce noise

**Cleaning Effect show:**

# CLEANING EFFECT

Better cleaning when cleaning with detergent

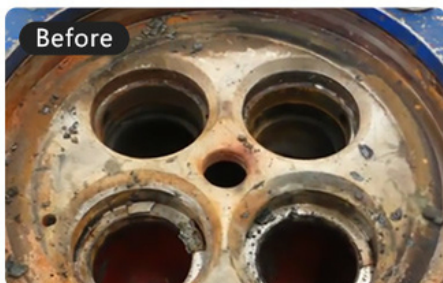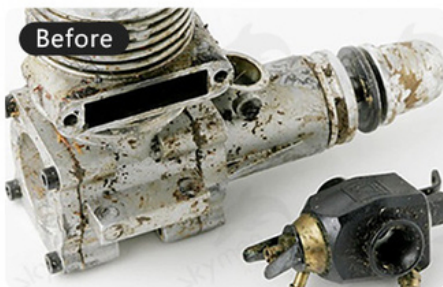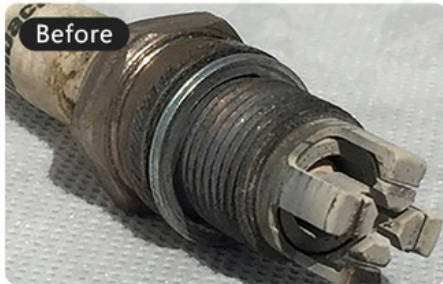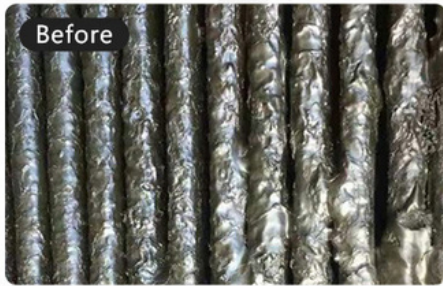

## Working Principle:

The principle of the ultrasonic cleaning machine is mainly to convert the sound energy of the power ultrasonic frequency source into mechanical vibration through the transducer, and to irradiate the ultrasonic wave into the cleaning liquid in the groove through the cleaning tank wall. Due to the radiation of the ultrasonic waves, the microbubbles in the liquid in the tank can be kept vibrated by the action of the sound waves. The adsorption of the dirt and the surface of the cleaning member is destroyed, causing fatigue damage of the dirt layer to be rejected, and the vibration of the gas type bubble scrubs the solid surface.





Professional Ultrasonic Cleaning Equipment Manufacturer

## Our Advantages

**13+**

13+ years R&D  
experience

**10,000+**

10,000+ square  
meters factory

**200+**

200+ experienced  
employees

**120+**

120+ countries and  
areas exported

## Our Factory





# PRODUCTION PROCESS



① Raw Material




② Board Cutting




③ Tank Welding



④ Transducer Installation




⑤ Skymen Transducer Wiring



⑥ Tank Polishing



⑦ Assembling




⑧ Age Testing



⑨ Skymen Factory Shipping

## Our RD Team

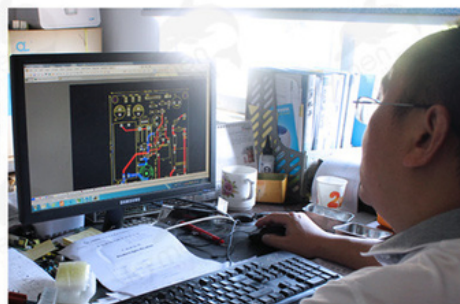

**Sky men Technology Corporation Limited**

☎ 86-755-27094405

✉ info@skymen.cc

🌐 skymenultrasonic.com

Floor 1st & 2nd, Building 3, Tanggang Taifeng Industrial Park, Dawangshan Community, Shajing Street, Bao'an District, Shenzhen