

1500W Submersible Ultrasonic Transducers Adjustable Timer Rigid Tube Wiring Connected

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: SkyMen
- Certification: CE ROHS FCC SGS
- Model Number: JP-1030I
- Minimum Order Quantity: 1 unit
- Price: USD300~1200USD / SET
- Packaging Details: 1 unit per carton / wooden case
- Delivery Time: In Stock
- Payment Terms: T/T
- Supply Ability: 8000 pcs per month



Product Specification

- Transducer: 30pcs
- Generator: Yes; 1500W
- Ultrasonic Power: 1500W
- Thickness: 2.5mm
- Frequency: 40khz
- Wiring Methods: Rigid Tube
- Highlight: 1500W Submersible Ultrasonic Transducers, SUS Submersible Ultrasonic Transducers, Adjustable Timer Submersible Transducer



for more products please visit us on skymenultrasonic.com

Product Description

1500W Submersible Ultrasonic Transducers For Removing Soldering Flux From Sensitive Electronic Components

Parameter:

Model No.	JP-1030I
Function	Ultrasonic Cleaning
Ultrasonic Frequency	28/40KHz
Material	SUS304
Transducer	30pcs
Time setting	1-99 hours adjustable
Power Supply	AC220V/ 50Hz
Ultrasonic Power	1500W (40%-100% adjuatable)
Box Size (LxWxH)	460*370*100mm (L*W*H)
Generator	1 set
Wire method	Rigid tube connect to box
N.W./G.W.	35KG/40KG Packed by plywood box
Quantity	1pcs

Other size for your choice:

Model	Tube Size (D*H)mm	Transducers (pcs)	Ultrasonic Power (W)	Weight (KG)	Frequency (Khz)	Generator (set)
JM-1003	57*180	3	150	3	28/40	1
JM-1006	57*300	6	300	5	28/40	1
JM-1012	57*550	12	600	10	28/40	1
JM-1018	57*750	18	900	15	28/40	1
JM-1024	57*1000	24	1200	20	28/40	1
JM-1036	57*1520	36	1800	30	28/40	1


Model	Plate Size (L*W*H)mm	Transducers (pcs)	Ultrasonic Power (W)	Generator (set)	Frequency (KHz)	Sample Price (\$)	2-20pcs (\$)
JP-1006I	305*205*100	6	300	1	28/40	430	385
JP-1012I	355*305*100	12	600	1	28/40	550	465
JP-1018I	340*280*100	18	900	1	28/40	600	525
JP-1024I	430*280*100	24	1200	1	28/40	680	630
JP-1030I	460*370*100	30	1500	1	28/40	750	700
JP-1036I	550*450*100	36	1800	1	28/40	840	775
JP-1048I	600*450*100	48	2400	1	28/40	1220	1130

Feature:


1. The default frequency is 28/40KHz, if need other frequency(20/68/80/132KHz), then need to quote.
2. Tank material is SUS304, if need SUS316, then price is 20% higher
3. There is no Skymen Logo for this series machine on sale, can put customer's logo, MOQ is 2pcs.
4. This series machine is mainly for distributor to take up market.
5. All the box can be put in water to working directly, customer needs to weld tank by himself.

Actual usage scenarios



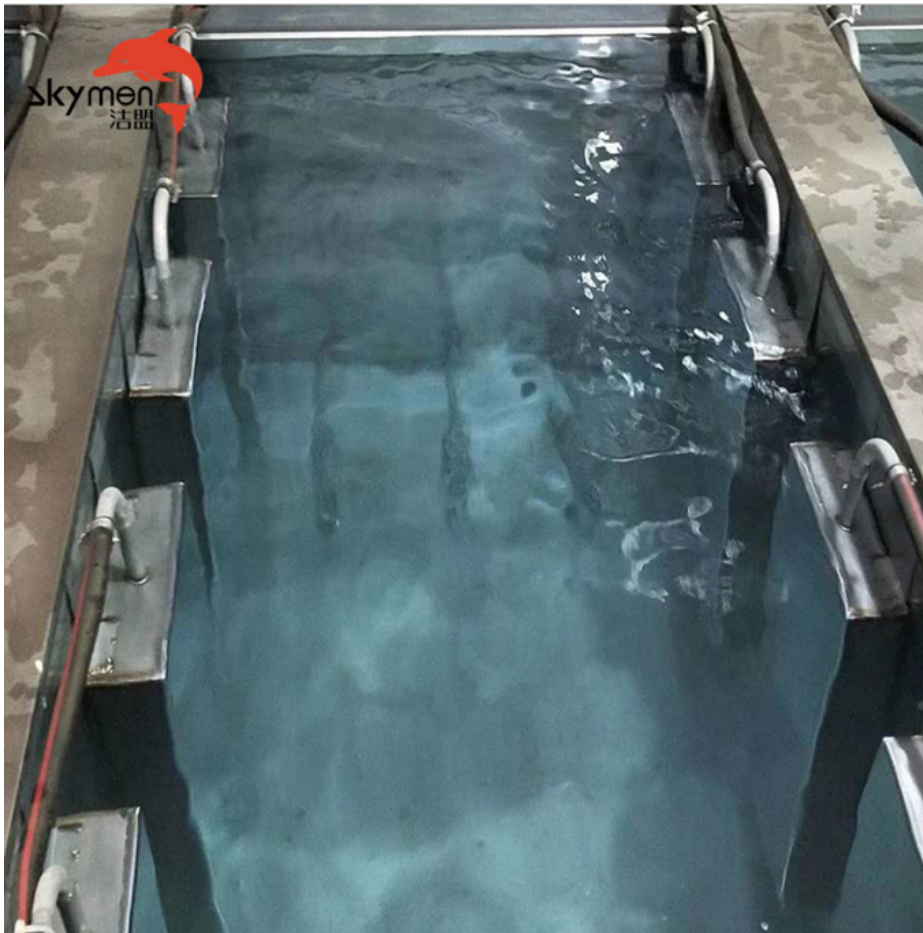

TYPICAL APPLICATIONS

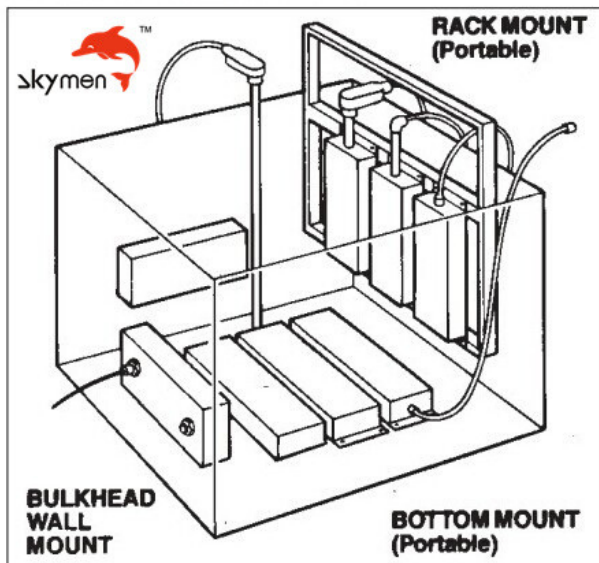

Sky men Technology Corporation Limited

☎ 86-755-27094405

✉ info@skymen.cc

🌐 skymenultrasonic.com

Floor 1st & 2nd, Building 3, Tanggang Taifeng Industrial Park, Dawangshan Community, Shajing Street, Bao'an District, Shenzhen